



Lifting the world with ease

## HENGDA FUJI ELEVATOR CO.,LTD.

Add: No.688.Lianxi Road, Lianshi Town, Nanxun, Huzhou, Zhejiang, China  
Tel: 0086-572-3061000 Fax: 0086-572-3651211  
Mobile: +86 13587250007(Whatsapp, Wechat) Skype: hengdafuji  
Web:www.fujihd.net E-mail:export@hengdafuji.com



## HENGDA FUJI ELEVATOR CO.,LTD. PAKISTAN BRANCH

Add: Office # 99, Sun Flower Society, J-1, Johar town, Lahore  
Tel: +92-42-35315599 Fax: +92-42-35315598  
Mobile: +92-321-6266725(Whatsapp, Wechat)  
Web:www.fujihd.net E-mail:adeel@hengdafuji.com

HENGFU GROUP

# FUJIHD®

-  Passenger Elevator
-  Observation Elevator
-  Freight Elevator
-  Car Elevator
-  Villa Elevator
-  Escalator
-  Moving Walk



# Industrial Intelligent Of 4.0 Factory Set Sail

The company has awarded dozens of titles and qualifications like "Standing Council Unit of China Elevator Association", "National Special Equipment Installation and Transform AA-class license", "National hi-tech Enterprise", "High and New Technology Research and Development Center in Zhejiang Province", "Patent Demonstration Enterprise in Zhejiang", "Well-known firms in Zhejiang Province", "Zhejiang Famous Brand Certificate", "Zhejiang Provincial Enterprise Technological Center" and so on.

HENGDA FUJI Elevator Co., Ltd holds double-A qualification which are the National Special Equipment Manufacturing License and Installation Maintenance License approved by the State Administration for Industry and Commerce of the National Professional Elevator Manufacturing Enterprise. With registered capital of 300 million RMB, the company was founded in 1987, in nearly 30 years development course, HENGDA FUJI has been into a period of innovation and development in building domestic machine elevator brand in the scale of production, and becoming one of the largest enterprises of the annual sales in market share.

Industrial intelligent 4.0 formal of a new factory set sail! As the largest, and the most advanced machine equipment modern large manufacturing base in zhejiang province, the company has developed rapidly based on the independent R&D and innovation technology. Set up the product research and development center, focus on new product development, technical innovation, we uphold the faith which is dedicated to providing our customers with high-quality products and first-class service. The quality of the products from designing to manufacturing, from installation to services, are strictly controlled. To provide customers with cost-effective elevator products, also reflects the responsibility for their own deep concern and commitment!

The company, which is based on scientific and technological innovation, has won the "two-way dynamic solar photovoltaic elevator" approved by the state Patent Office for more than one hundred invention patents and utility model patents. At the same time, dozens of invention patent which are under examination and approval have been accepted.

With the ideal of harmonious integrity mutual gratitude, HENGDA FUJI Elevator provides nanny services with preferential prices to achieve a win-win development. Our joint efforts is to make families enjoy a more security, environmental, comfortable of elevator delivery provided by HENGDA FUJI Elevator.

Invested nearly 1 billion RMB, the four stages of the project covers an area of nearly two hundred mu, with total construction area of 80000 square meters, has a new type of vertical elevators, escalators, automatic sidewalks, article 6 of the world's advanced fully automated production line, R&D center, intelligent office building and 150 meter-high elevator testing tower equipped elevator with speed of 10 meters per second. Intelligent layout in accordance with the standards of world class factory, taking lead in introducing industrial 4.0 concept, making the production capacity is improved that the annual output of 50000 sets of all kinds of elevator machine, 5000 sets of parking equipment and 20000 sets of elevator accessories production capacity.



Scan to know more information



# Introducing International Top Equipments And Make “made In China” affect The World



Optical fiber laser cutting machine production line



Car wall automated assembly line



CNC bending machine



KUKA robot in Germany



Italy imported SALVANINI flexible sheet metal processing production line



Escalator production workshop



Spraying Line (German WAGNER Spraying Room)

As the largest and the most advanced machine equipment of the modern large manufacturing base in ZheJiang Province, company introduced SALVANINI and a series of the world's leading fully automated production lines, will be fully implemented 4.0 intelligent manufacturing industry, also reveals the enterprise in the field of "machine substitution" solid results.

Achieve the annual output of 50000 sets of elevator machine, 5000 sets of parking equipment and 20000 sets of elevator accessories production capacity.

# The brilliant course mold supreme quality

HENGDA FUJI keep pace with you, and develop together. Towering temper, come a powerful journey of glory!

HENGDA FUJI Elevator always adhere to the quality consistent product manufacturing standards and transcend the service standard of the industry, integrating global resources with high quality. Standing in the stage of new era, HENGDA FUJI Elevator creates a unique brand of high-end elevators with higher attitude and idea for global customers to provide distinguished elevator products and services.



The enterprise restructured to system of contracted responsibility.



Enterprises to achieve cooperation with foreign technology, the introduction of advanced control technology, changed its name to Zhejiang Hengda Fuji Elevator Co., Ltd. And further integration of foreign negotiations, to achieve technical and capital cooperation in the field of consistency, renamed the Sino-foreign joint venture Zhejiang Hengda Fuji Elevator Co., Ltd.



Registered capital increased to 120 million, and renamed to HENGDA FUJI Elevator Co., Ltd.



With the full realization of production management and brand enhancement, the company step into the first-class elevator brand manufacturers.



Company take lead in internet of thing censorship in elevator running in the industry, make real-time tracking in elevator using 24 hours a day, broke through the blank of not using real-time tracking in elevator using.



In 2016, the new factory of HENGDA FUJI GROUP Elevator's HENGDA FUJI Elevator, which was more than 200 acres, was officially completed, and the future of Hengfu will be opened.



HENGDA FUJI was once again awarded the New Elephant Award from the local government. At the same time, it won the honorary title of Huzhou City Taxpayer, which reflects the social value of the company.

Timeline of Hengda Fuji Elevator Co., Ltd. from 1987 to 2018.


- 1987**: Huzhou Hengda elevator factory was established to create a "Hengda" brand new brilliant road.
- 1993**: The enterprise restructured to system of contracted responsibility.
- 1998**: Enterprise changed its name to Zhejiang Hengda Elevator Co., Ltd.
- 2004**: Enterprises to achieve cooperation with foreign technology, the introduction of advanced control technology, changed its name to Zhejiang Hengda Fuji Elevator Co., Ltd. And further integration of foreign negotiations, to achieve technical and capital cooperation in the field of consistency, renamed the Sino-foreign joint venture Zhejiang Hengda Fuji Elevator Co., Ltd.
- 2008**: Enterprises to achieve restructuring, bear the courage for the first, to climb the peak of the industry mission.
- 2009**: Registered capital increased to 120 million, and renamed to HENGDA FUJI Elevator Co., Ltd.
- 2010**: Invest 180 million RMB, covers an area of one hundred Mus test tower height of meters Three plant completed.
- 2012**: With the full realization of production management and brand enhancement, the company step into the first-class elevator brand manufacturers.
- 2013**: Company's registered capital increased to 200,080,000 RMB, annual production capacity to 20,000 units, and the full implementation of modern management and operation. HENGFU GROUP was established, and the administered HENGDA FUJI Elevator Co.,Ltd. DAZO Elevator Co.,Ltd.etc.
- 2014**: Company take lead in internet of thing censorship in elevator running in the industry, make real-time tracking in elevator using 24 hours a day, broke through the blank of not using real-time tracking in elevator using.
- 2015**: Company officially promoted in December 2015 to become China's Elevator Association governing units. And become enterprise signed the first local and elevator safety liability insurance coinsurance, future factory each elevator has PICC escort.
- 2016**: In 2016, the new factory of HENGDA FUJI GROUP Elevator's HENGDA FUJI Elevator, which was more than 200 acres, was officially completed, and the future of Hengfu will be opened.
- 2017**: In 2017, HENGDA FUJI joined Zhejiang University to establish a high-performance elevator joint laboratory and the top ten supplier honors of the 2017 National Government Procurement Elevator. (Award: 2017年度全国政府采购电梯十佳供应商)
- 2018**: HENGDA FUJI was once again awarded the New Elephant Award from the local government. At the same time, it won the honorary title of Huzhou City Taxpayer, which reflects the social value of the company.

150 meters meet 10 m/s ultra-high speed elevator testing tower, in domestic leading position.

HIGHER, FASTER EXPERIENCE, SAFER FROM THE FUJIHD TECHNOLOGY



## Environmental protection

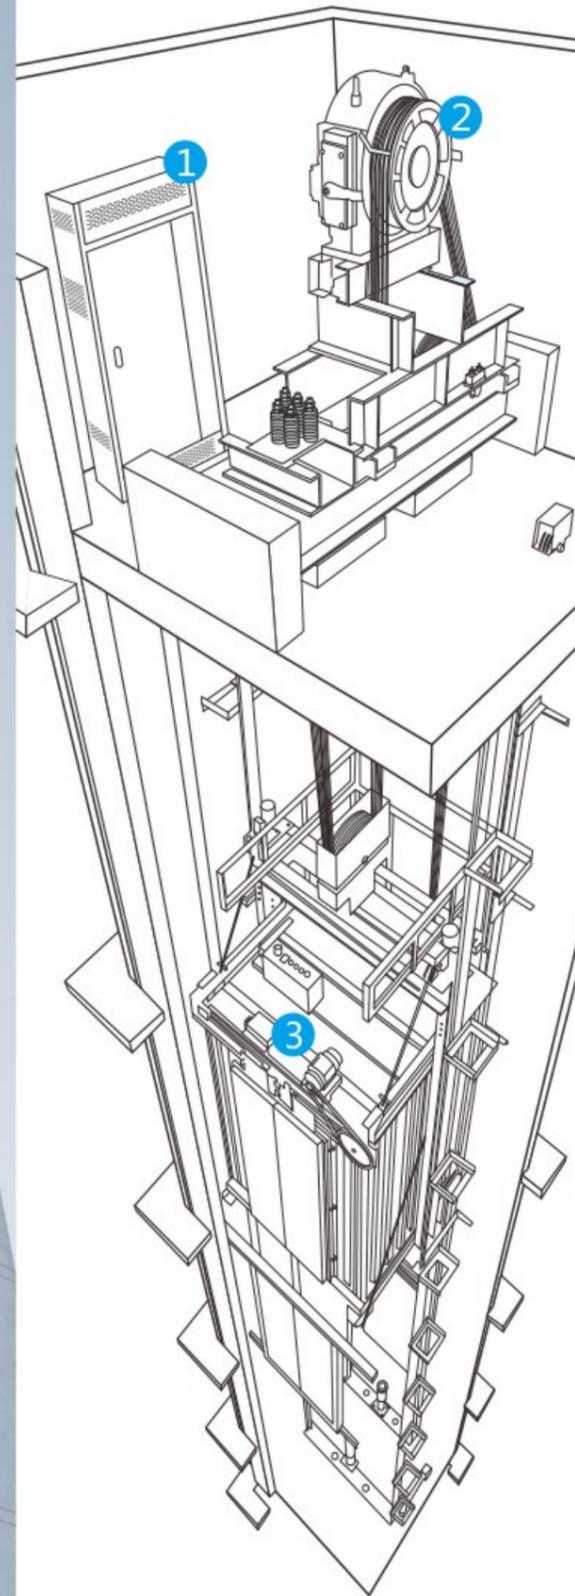

### 1 Intelligence system the genius in the city

Integral control system represents the developing orientation of the elevator control system. It is a new generation of intellectual vector type integral control system. It covers distance control, direct parking, closed-loop vector control technology, CANBUS communication technology, multi-CPU running technology and applies C and assembly language programming. It perfectly combines the contemporary industrial control technology, communication technology and traditional elevator. Compared with the traditional elevator control system, it brings about a high price and performance ratio and more convenient maintenance.



### 2 Permanent magnet synchronous gearless traction machine

We choose rare earth material and fully combine coaxial transmission technology and digital variable frequency technology with group computer combined control technology. With less running cost & less energy dissipated. Compared with the ordinary and traditional technology, Gearless traction machine can save more than 33% of the energy. Gearless traction machine needs no renewal of lubricant, No grease pollution, low noise, quiet & natural.



### 3 Top advanced door operator system

HENGDA FUJI elevator applies the advanced VVVF variable voltage and variable frequency control technology to the elevator door operator system so as to ensure the smooth elevator door and quiet switch. What is more, the self-learning door load detector increases the sensitivity of the elevator door switching on/off. It monitors the variation of elevator door load on every floor. Automatically rectifying the most appropriate open shut speed in every floor so as to guarantee the security and reliability.



# Safety

We Hengda Fuji Elevator every day tens of millions of people ride our products, we are committed to maintaining the safety of each elevator transport, and track the operation of each elevator.



## Safety of our products and services

FUJIHD is actively involved in the development of codes and standards that aim to further improve the safety of the equipment. We enhance the safety of FUJIHD products and services through rigorous attention to our design, manufacturing, installation, and maintenance processes.

Modernization keeps elevators, escalators and automatic doors running smoothly throughout the lifetime of your building. It ensures that equipment works safely and reliably with minimum disruption. With small upgrades your old equipment can be brought up to date with the latest safety standards.



## User safety

We are strongly commitment to safety and work closely with the people who rely on our products for safe and smooth transport as they go about their day. One way we promote safety is by organizing annual events that give people the opportunity to get to know how elevators and escalators operate and how to use them safely.

Elevator and escalator users also need to pay attention to their own behavior. For example, children should be properly supervised when using both elevators and escalators, and large items such as baby strollers, heavy luggage, or shopping carts should not be transported on escalators.



## Safety of our employees

At FUJIHD, we focus on making sure every one of our employees has the necessary competence to perform their work in a professional and safe manner. All employees receive training to a general level in health and safety, as well as training relevant to their respective work roles and tasks.

To support continuous improvement in FUJIHD's safety performance, a procedure is in place to report and investigate accidents. The underlying root causes are identified and corrective actions implemented to ensure that the accident or near-miss incident is not repeated. As a result, we have improved our safety performance steadily over the years.



## Elevator object network monitoring system

Elevator networking is to solve the current elevator safety issues proposed concept, data acquisition part, data transmission part, the central processing part and application software together constitute a complete elevator object monitoring system.

Acquisition instrument to collect the elevator running data analysis and upload to the Internet monitoring center, combined with platform application software, in order to achieve the relevant units of the elevator real-time effective supervision and maintenance.



## Testing center

We have professional testing equipment 11, to undertake the detection of elevator locks, door machines, floor doors, speed limiters, photoelectric switches, buttons, traction wire rope, escalator roller, handrail, metal mechanical properties, salt spray test project 20 Balance item According to the development needs, the testing center this year will also plan to introduce a number of vibration testing equipment and other testing equipment, and constantly expand the scope and ability to detect. Testing Center in the "scientific management, standards, objective and fair, accurate and timely" approach, strict control management, to meet the company's production and quality inspection needs, but also have other users to provide the same project testing services.

# Green energy saving


## Automatic lighting of LED energy-saving lamp

We use energy-saving LED lamp. When nobody uses the elevator, the lighting in the car will turn off automatically & automatically turn on once receiving any calling commands. Saving the electricity energy consumption sufficiently.



## Sterilization function

Applying advanced environment protection technology, PM2.5 dust in the air etc. will from to molecular clusters and sink to the ground by anion. It will lessen the bacterial survival ability or kill bacteria. Timing sterilizing and air cleaning improve the cabin environment.




## Energy feedback system

Energy regenerating feedback technology of LHEC can recover and re-use as high as 30% energy that has been consumed by the elevators. Especially in the elevator no-load up-motion or full-load down-motion, the electric energy that has been produced by the motors is transformed into resistance heat and only be wasted in vain. Energy regenerating feedback device converts electric energy into normal current that coincides with electric grid. Therefore these newly-produced current can be used in other power equipments in the building. It fulfills a genuine energy-saving effect.



## Electromagnetic compatibility without interference with each other

HENGDA FUJI passenger elevator control system fully abides by the relevant electro-magnetic compatibility standard, removes the electro-magnetic pollution, effectively prevents from the electromagnetic wave interference between the elevator signals and various precision electrical equipments in the building.

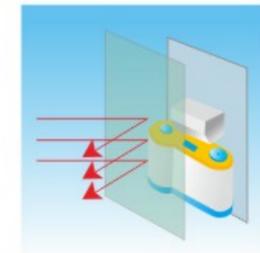


# FUJIHD the best solution — Hotel

-  Passenger elevator
-  Observation elevator
-  Freight elevator
-  Car elevator
-  Escalator

# Project Achievements

HENGDA FUJI Engineering, Accelerate The World

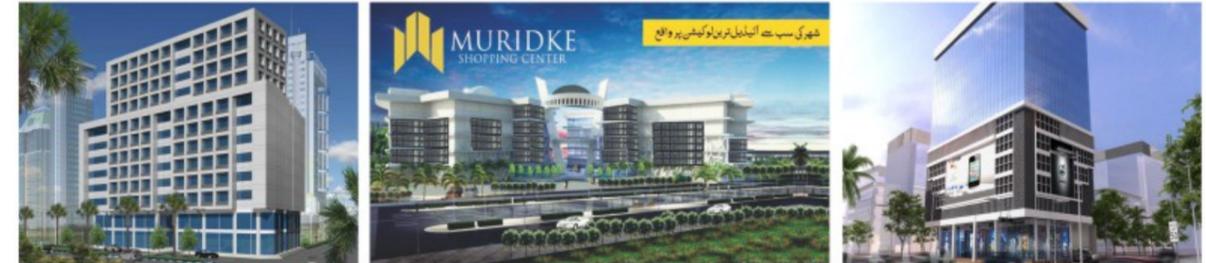

Karachi-ITC PLAZA

Muridke Shopping Center Gujranwala

Karachi-SOUTH CITY



1-R, MM Alam Road, Lahore

Bakhtawar Amin Medical College Multan

Noor Shopping Mall and Residency Rawalpindi



Makki Complex Lahore

Mall of Defence Lahore

Misaq ul Mall, Faisalabad



Grand Palm Hotel Lahore

Square One Lahore

Askari Apartments Islamabad



Rawalpindi Institute of Cadialogy

Sahiwal Galleria, Sahiwal

Siddique Family Hospital, Gujranwala

## The Manor

FUJIHD

The manor project is a five-star hotel-style apartment near the Kuala Lumpur Twin Towers with luxurious night views and a convenient location in the city center. FUJIHD designed a high-speed passenger elevator with a speed of 4m / s for this building. The perfect product design uses an inner rotor. The traction machine reduces the noise and energy consumption by more than 40%. This design scheme allows users to use the elevator safer, faster and more comfortable.

- Date of Completion: 2018
- Location: Malaysia
- Product: Small Machine room elevator | 49 floors, 4 meters per second

## Build Asia Exhibition Karachi, 2019



FUJIHD. Reliable Elevator Suppliers — Project Achievement

# Project Achievements



5th AVENUE, MM ALAM ROAD, Lahore



A-One-3, MM Alam Road, Lahore



Askari apartments Lahore



Jullundur Mall, Rahim Yar Khan



Mughal Mahal, Gujranwala



Meridian Hotel, Gujranwala



16th Avenue, Gujranwala



Bashir Mall, Rahim Yar Khan



Florets Luxury Apartments, Lahore



Zubair Feeds, Pak Pattan



Civic Center, Gujranwala



Imran Idrees Hospital, Sialkot



Sadiq Feeds Pvt Ltd, Rawalpindi



Royal Palm City office Gujranwala



W-Mall, MM Alam Road, Lahore



Zaraj Housing Scheme, Islamabad

# Passenger Elevator-Profile

HENGDA FUJI small machine room passenger elevator only has about 65% ~ 70% of the traditional machine room. It greatly saves building space and material. Control cabinet in machine room is designed into single-face inspection layout. The host bearing beam can also be used as hitch plate. It largely saves the machine room space. Compared with the traditional elevators, under the premise of ensuring the repairers' operation space which is stipulated by the national standard, it effectively controls the machine room height. The intensive space effect grants more freedom for the architects. It expands the larger space utilization to the construction, perfectly merges the well space with the architectural style.




Less space,  
faster construction

Compared with HENGDA FUJI small machine room elevator, machine room is only an extension of the elevator well, It brings about more convenient installation, the lower cost as well.

Impressive energy savings

Compared with the traditional traction machine, HENGDA FUJI small machine room elevator consumes less energy and lower loss in heat energy.

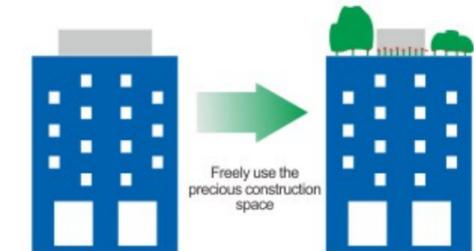

# Passenger Elevator-Profile




HENGDA FUJI machine roomless passenger elevator cancels the machine room, reduces total area of the elevator equipment and flexibly utilizes the effective space. It has stronger contemporary sense and more beautiful construction outline.

The host and control device are designed at the shaft top to prevent from occasional water-inlet in the shaft which damages the drive device. In this way, it guarantees a highly reliable system.

Blended into the construction, easily and leisurely

HENGDA FUJI machine roomless passenger elevator need only one independent hoist-way and do not need the presence of machine rooms. Architects and develop-ers are allowed to conduct designing in a freer way.

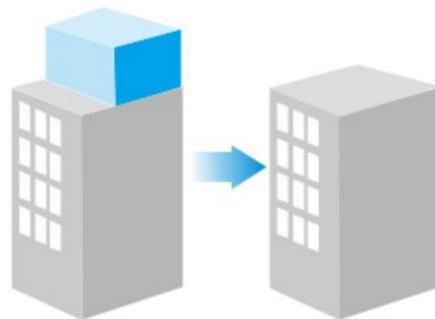

We cancel the machine room to freely design the shaft position. We can flexibly and effectively apply the top space which was preset for machine room.

# Passenger Elevator Standard Car Decoration

The unique hairline stainless steel car made by HENGDA FUJI mixes with a distinctive ceiling creates exciting visual effects and bright contemporary look.



## HD-JX12

**Ceiling:** Diamond silver painted steel with acrylic photic board.  
**Car wall:** Hairline stainless steel  
**Operating panel:** Integrated operating panel (HD-C12)  
**Floor:** PVC (FJ-B01)



Scan to know more information



## HD-JX18A

**Ceiling:** Simple integrated stainless steel ceiling with acrylic transparent plate  
**Car wall:** Hairline stainless steel  
**Operating panel:** Integrated operating panel (HD-C12)  
**Floor:** PVC (FJ-B01)



Scan to know more information



Landing door and jamb: Hairline stainless steel is adopted for the first floor and plastic jet steel plate is adopted for other floors.

## Passenger Elevator Car Decoration (optional)



### HD-JX06

- Ceiling:** Mirror frame, supplemented by led on mirror stainless steel plate, the middle section is arched white plate light lighting design
- Car wall:** Center plate mirror etched stainless steel, two flanks hair grain stainless steel
- Handrail:** Stainless steel flat handrail
- Floor:** Standard PVC(optional marble)



### HD-JX12-2

- Ceiling:** Mirror stainless steel framework, acrylic arched top plate, LED light
- Car wall:** Stainless steel hairline on both sides, combination of stainless steel hairline and hairline mirror at rear wall
- Floor:** Standard PVC(optional marble)

## Passenger Elevator Car Decoration (optional)



### HD-JX12-7

- Ceiling:** Stainless steel frame in middle, white transparent board on both sides of the soft lighting design, two sides made of stainless steel(HD-DT13)
- Operating panel:** Integrated operating panel (HD-C12)
- Car wall:** Two sides made of stainless steel, the middle of the wall mirror etching stainless steel
- Car door:** Hairline stainless steel
- Flooring:** PVC (FJ-B18)



### HD-JX12-3

- Ceiling:** Mirror stainless steel framework, acrylic top plate, intermediate down lamp decoration (HD-DTA04)
- Operating panel:** Integrated operating panel (HD-C12)
- Car wall:** Stainless steel hairline on both sides, combination of stainless steel hairline and etched mirror at rear wall
- Car door:** Hairline stainless steel
- Flooring:** PVC (FJ-B01)



### FJ-JXA12

- Ceiling:** Acrylic lighting decoration, stainless steel mirror
- Car wall:** Stainless steel hairline, stainless steel mirror
- Handrail:** Stainless steel hairline
- Floor:** Standard PVC(optional marble)



### FJ-JXA13

- Ceiling:** Acrylic lighting decoration, stainless steel hairline, down lamp
- Car wall:** Etched mirror, stainless steel hairline
- Handrail:** Stainless steel flat handrail
- Floor:** Standard PVC(optional marble)



### HD-JX12-4

- Ceiling:** Stainless steel mirror base-plate is supplemented by rectangle hollow transparent light pole. The soft lighting design of arched white light-passing board is in the middle part (HD-DTA03)
- Operating panel:** Integrated operating panel (HD-C12)
- Car wall:** Stainless steel hairline on both sides, combination of stainless steel hairline and etched mirror at rear wall
- Car door:** Hairline stainless steel
- Flooring:** PVC (FJ-B01)



### HD-JX12-5


- Ceiling:** Mirror stainless steel frame, acrylic transmitting top plate (HD-DTA11)
- Operating panel:** Integrated operating panel (HD-C12)
- Car wall:** Stainless steel hairline on both sides, combination of stainless steel hairline and etched mirror at rear wall
- Car door:** Hairline stainless steel
- Flooring:** PVC (FJ-B01)

## Passenger Elevator Car Decoration (optional)



**FJ-JXA11** ⤴

**Ceiling:** Black titanium mirror stainless steel frame, down lamp, top panel LED discolor lighting  
**Car wall:** Stainless steel hairline, black titanium mirror  
**Handrail:** Stainless steel round tube  
**Floor:** Standard PVC(optional marble)

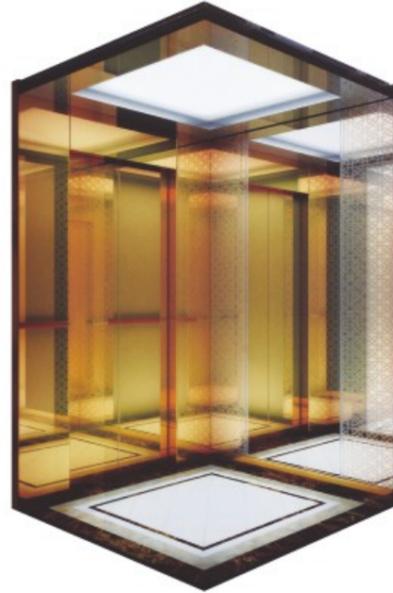

**FJ-JXA02** ⤴

**Ceiling:** Titanium gold stainless steel hairline  
**Car wall:** Etched stainless steel mirror plated with bronze color, glass mirror  
**Handrail:** Stainless steel round tube, wood handrail  
**Floor:** Standard PVC(optional marble)

## Passenger Elevator Car Decoration (optional)




**HD-JX12-6** ⤴

**Ceiling:** Vortical square image main body board and tube lamp combining for soft illumination design (HD-DDB02)  
**Operating panel:** Integrated operating panel (HD-C12)  
**Car wall:** Stainless steel hairline on both sides, combination of stainless steel hairline and etched mirror at rear wall  
**Car door:** Hairline stainless steel  
**Flooring:** PVC (FJ-B01)




**FJ-JXA06** ⤴

**Ceiling:** Stainless steel, acrylic LED  
**Car wall:** Glass, bronze colored hairline stainless steel etch  
**Handrail:** Hairline stainless steel flat handrail  
**Floor:** Standard PVC(optional marble)

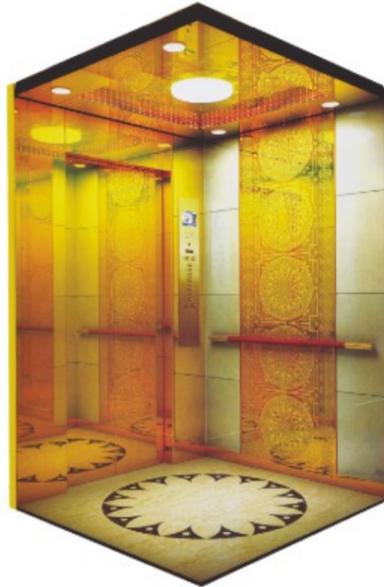

**FJ-JXA01** ⤴

**Ceiling:** Titanium gold mirror frame, down lamp, etched titanium gold mirror, ceiling lamp  
**Car wall:** Marble, etched mirror, titanium gold mirror  
**Handrail:** Titanium-plated stainless steel round tube, wood round tube  
**Floor:** Standard PVC(optional marble)

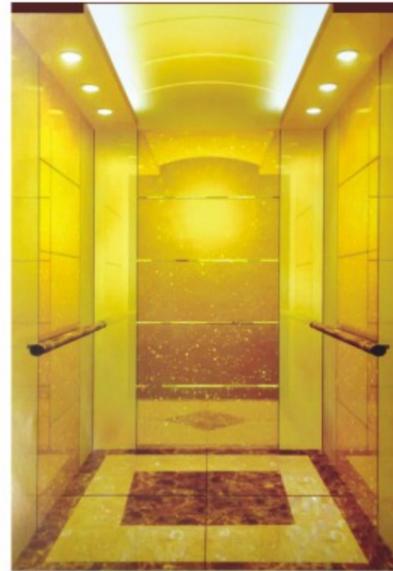


**FJ-JXA03** ⤴

**Ceiling:** Titanium gold stainless steel  
**Car wall:** Combination of golden polystyle line, glass and titanium gold stainless steel  
**Handrail:** Hairline Stainless Steel with round type  
**Floor:** Standard PVC(optional marble)



**FJ-JXA09** ⤴

**Ceiling:** Steel plate baked enamel framework, stainless steel mirror hollowed hole top plate  
**Car wall:** Titanium gold minor stainless steel etching  
**Handrail:** Titanium gold stainless steel tube  
**Floor:** Standard PVC(optional marble)

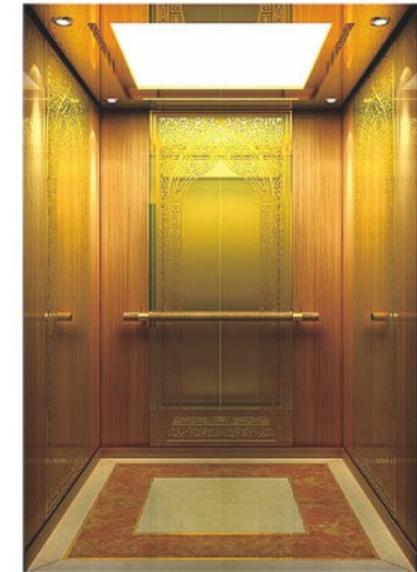

**FJ-JXA15** ⤴

**Ceiling:** Titanium mirror frame, LED lights belt, LED light  
**Car wall:** Wood veneer, mirror stainless steel etched titanium plating  
**Handrail:** Titanium coating on wood and stainless steel  
**Floor:** Standard PVC(optional marble)

## Passenger Elevator Car Decoration (optional)



FJ-JXA16 

**Ceiling :** The wooden frame, LED lighting  
**Car wall :** Bronze hairline and hairline etching plating  
 bronze combinations  
**Handrail :** Stainless steel handrail  
**Floor :** Standard PVC(optional marble)



FJ-JXA17 

**Ceiling :** The wooden frame, white acrylic  
 pervious to light  
**Car wall :** Wood veneer, back wall glass in the middle  
**Floor :** Standard PVC(optional marble)



FJ-JXA18 

**Ceiling :** On both sides of the front LED light, middle  
 stainless steel mine, white acrylic pervious to light  
**Car wall :** After middle wall art glass, acrylic modelling, on both  
 sides hide light, on both sides of the middle wood  
 veneer, waist line of a concave, hidden lights  
**Floor :** Standard PVC(optional marble)



FJ-JXA19 

**Ceiling :** Four side LED light, imitation bronze, stainless  
 steel LED lamp belt  
**Car wall :** On both sides of the imitation bronze, stainless  
 steel back wall decoration frame, LED lights belt,  
 hidden lights  
**Floor :** Standard PVC(optional marble)

## Passenger Elevator Car Decoration (optional)




FJ-JXA20 

**Ceiling :** Among threads to steel, white colour steel  
 plate model, hide inside and outside lights  
**Car wall :** After middle wall white colour modelling,  
 the internal fritillaria hidden lights, wood  
 veneer wall glass mirror, titanium hair around  
 the borders, on both sides of the wood veneer  
**Handrail :** Titanium , log armrest  
**Floor :** Standard PVC(optional marble)



FJ-JXA21 

**Ceiling :** Titanium mirror stainless steel, on both  
 sides of the LED light, middle white dome light  
**Car wall :** Three side of the center plate for the titanium  
 surface of stainless steel, the rest of the titanium  
 hairline stainless steel  
**Handrail :** FJ - FS019 (titanium)  
**Floor :** Standard PVC(optional marble)

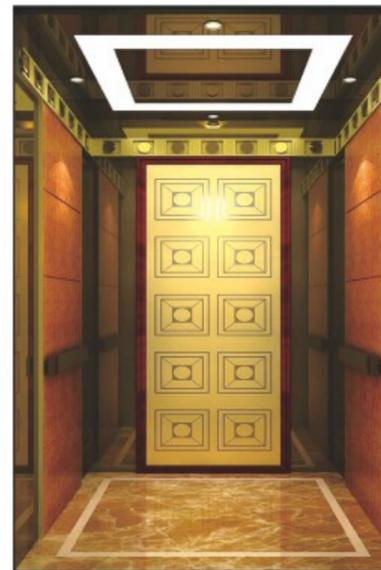

FJ-JXA22 

**Ceiling :** Around the black mirror stainless steel, titanium  
 LED light, back to the type of acrylic pervious to light  
**Car wall :** Back wall titanium etch stainless steel, wire frame  
 technology, black titanium stainless steel,  
 process lines, Wall black titanium stainless steel,  
 leather bag, process line  
**Handrail :** FJ-FS04(black titanium)  
**Floor :** Standard PVC(optional marble)



FJ-JXA23 


**Ceiling :** Sandblasted stainless steel, on both sides of the  
 LED light, middle white acrylic pervious to light  
**Car wall :** After middle wall mirror etched stainless steel, on  
 both sides of the middle imitation marble tile,  
 the rest of the titanium mirror stainless steel  
**Handrail :** FJ-FS04(titanium)  
**Floor :** Standard PVC(optional marble)

# Observation Elevator



## Standard Car Decoration

Not only sightseeing elevator glass steel structure perfect development compact space and whole artistic. Also may act according to the different construction to design, the convenience is quick, all uses the circular generally, the semicircle and the square shape.

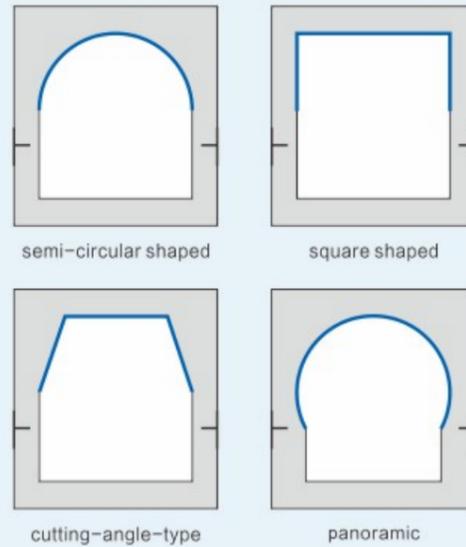

## HD-GA01

Upper / lower hood	Hairline stainless steel
Panorama wall	180° circular safety laminated glass
Decorative top	Painted steel framework, acrylic arch top plate
Car wall	Hairline stainless steel
Car door	Hairline stainless steel
Handrail	Φ25 stainless steel Tube
Floor	PVC

## Observation Elevator Car Decoration (optional)



## HD-GA02

**Upper/lower hood** : Steel plate paint  
**Panorama wall** : Laminated glass(3-PCS)  
**Decoration top** : Pintws steel framework, acrylic lighting decoration board, acrylic strip lighting decoration  
**Car wall** : Hairline stainless steel  
**Car door** : Hairline stainless steel  
**Handrail** : Stainless steel double-tube  
**Floor** : PVC (optional marble)



## HD-GA03

**Upper/lower hood** : Mirror stainless steel press sill, red acrylic decoration cover  
**Panorama wall** : Laminated glass three pieces  
**Decoration top** : Painted steel framework, acrylic lighting decoration  
**Car wall** : Hairline stainless steel  
**Car door** : Hairline stainless steel  
**Handrail** : Stainless steel double-tube  
**Floor** : PVC (optional marble)



## FJ-GA01

**Upper/lower hood** : Mirror stainless steel  
**Panorama wall** : Laminated glass  
**Decoration top** : Mirror stainless steel frame, roof light-emitting diodes (leds)  
**Car wall** : Mirror stainless steel frame  
**Car door** : Framed glass door  
**Handrail** : Stainless steel round tube  
**Floor** : PVC (optional marble)

## Observation Elevator Car Decoration (optional)

### FJ-GA02 >>>

**Upper/lower hood :** Titanium gold mirror  
**Panorama wall :** Laminated glass(3PCS combination)  
**Decoration top :** Titanium gold mirror, acrylic lighting decoration  
**Car wall :** Titanium gold mirror  
**Handrail :** Titanium gold handrail  
**Floor :** Standard PVC (optional marble)



### <<< FJ-GA03

**Upper/lower hood :** Stainless steel hairline, LED lamp  
**Panorama wall :** Laminated glass(3PCS combination)  
**Decoration top :** The steel plate baked enamel, acrylic lighting decoration  
**Car wall :** Stainless steel hairline  
**Handrail :** Stainless steel handrail  
**Floor :** Standard PVC (optional marble)

## Observation Elevator Car Decoration (optional)



### FJ-GA04 >>

**Upper/lower hood :** Stainless steel hairline, stainless steel mirror  
**Panorama wall :** Laminated glass(3PCS combination)  
**Decoration top :** Stainless steel frame, glass, lamp with, LED light  
**Car wall :** Stainless steel mirror frame, frosted glass, lamp with  
**Handrail :** Stainless steel round tube  
**Floor :** Standard PVC (optional marble)



### FJ-GA06 >>

**Upper/lower hood :** Panorama wall  
**Panorama wall :** Laminated glass three pieces  
**Decoration top :** Painted steel framework  
**Car wall :** Hairline stainless steel  
**Car door :** Hairline stainless steel  
**Handrail :** Stainless steel tube  
**Floor :** Standard PVC (optional marble)



### FJ-GA05 >>

**Upper/lower hood :** Painted steel  
**Panorama wall :** Laminated glass(3PCS combination)  
**Decoration top :** Stainless steel mirror top plate, acrylic lighting decoration  
**Car wall :** Laminated glass  
**Handrail :** Stainless steel tube  
**Floor :** Standard PVC (optional marble)



### FJ-GA07 >>

**Upper/lower hood :** Panorama wall  
**Panorama wall :** Glue glass of safety clamp 6+6  
**Decoration top :** Painted steel framework  
**Car wall :** Hairline stainless steel  
**Car door :** Hairline stainless steel  
**Handrail :** Stainless steel tube  
**Floor :** Standard PVC (optional marble)

# Villa Elevator

HENGDA FUJI villa elevator adheres to the design idea of environmental protection and energy-saving and merges with the latest elevator technology nowadays in order to ensure safety and reliability of our products. The elegantly designed car, fine and exquisite craft and techniques show the outstanding performance and charm of HENGDA FUJI villa elevator.

"The journey scene" matches perfectly with the deluxe and fashionable villa. It is so comfortable and convenient in using HENGDA FUJI villa elevator. You will enjoy your noble life as well.




## Villa Elevator Car Decoration



⌘ **HD-BT01** (Standard)

**Ceiling:** Stainless steel, tube light  
**Car wall:** Hairline stainless steel  
**Floor:** PVC

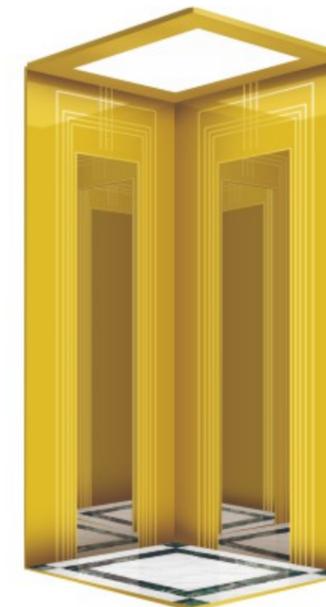

⌘ **HD-BT03** (Optional)

**Ceiling:** Glazed stainless-steel frame light-passing board  
**Car wall:** Titanium, etching, mirror  
**Floor:** PVC (optional marble)



⌘ **HD-BT04** (Optional)

**Ceiling:** Glazed stainless-steel frame, tube light  
**Car wall:** Color steel plate, glazed stainless-steel, soft wood roll  
**Floor:** Standard PVC(optional marble) (FJ-B01)



⌘ **HD-BT05** (Optional)

**Ceiling:** Glazed stainless-steel frame, tube light  
**Car wall:** Glass, stainless steel  
**Floor:** PVC (optional marble)



⌘ **HD-BT06** (Optional)


**Ceiling:** Wooden frame, intermediate acrylic  
**Car wall:** Graining decoration / glass  
**Floor:** PVC (optional marble)



⌘ **HD-BT07B** (Optional)

**Ceiling:** Wood veneer, acrylic lighting  
**Car wall:** Wood veneer, gold  
**Floor:** Standard PVC(optional marble)

### Range of application

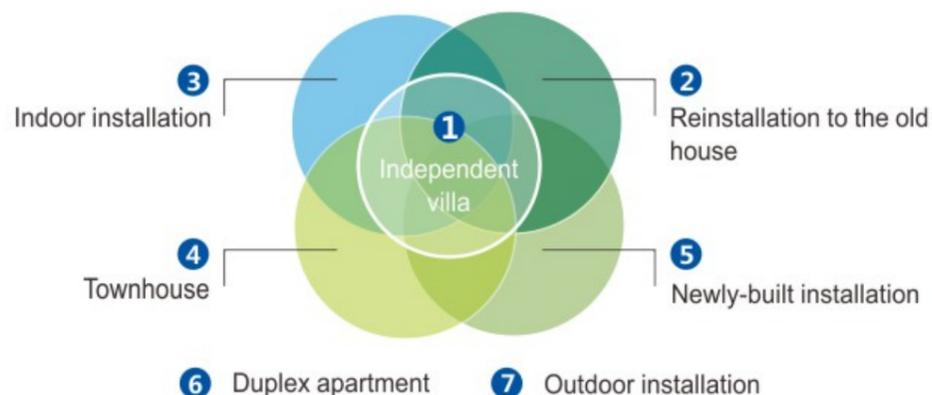



## Module segmentation, convenient and efficient

The elevator is mainly consisted of four parts, which are steel structure well, elevator package, connecting platform and exterior decoration. Firstly, pre-modular assembly is carried out in the factory to get sections of modular blocks. At the installation site, the whole installation of products can be finished by the setup and connection of those modular blocks.

Under normal circumstances, the steel structure and the main body of the elevator can be installed in 90 minutes, which can shorten the installation time, can quickly put into use, and has a small influence on the normal life of the community, and is convenient for users.


## Green environment, save space

Elevator shaft is made of steel structure with high recovery and utilization rate.

Taishan + series, compared with other series, covering 8% space, for the scene of the space layout and lighting are good. The WR horizontal machine, small tractor wheels, no base design, save the top space.



## Way home

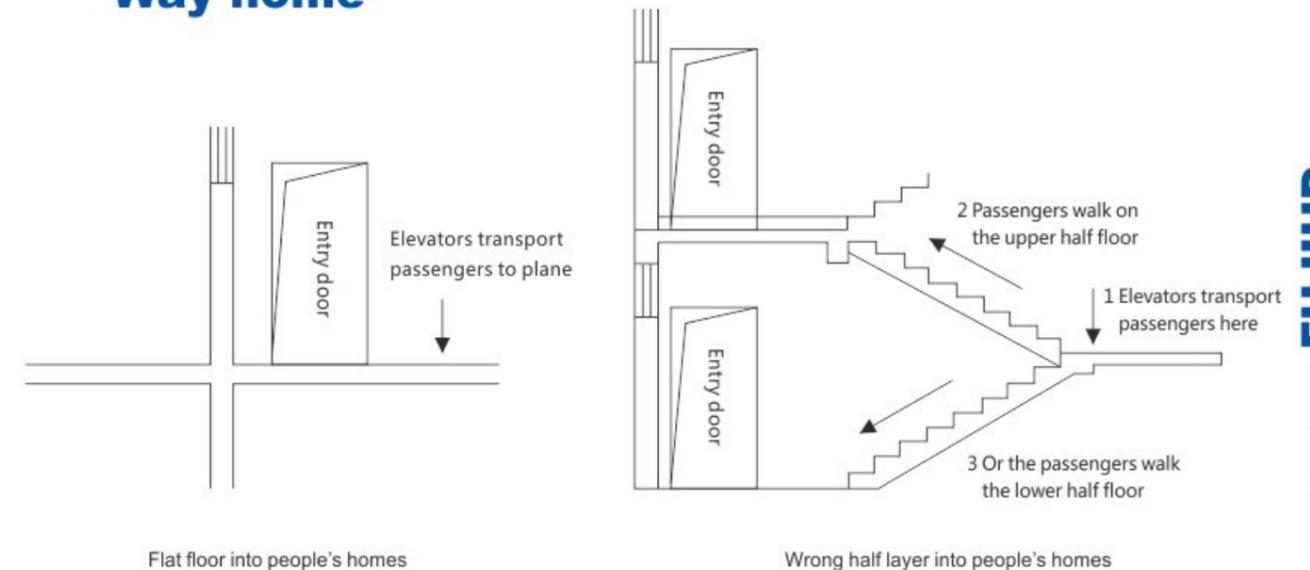

Flat floor into people's homes

Wrong half layer into people's homes

## Retrofitting elevator

With the development of modern society, people have higher and higher requirements on the quality of travel.

Many old residential buildings are equipped with no elevator facilities, so that it is very inconvenient for the special crowd, such as elder, pregnant woman and children, go up and down. It is also very easy to cause to cause accident.

In view of this phenomenon, HENGDA FUJI elevator developed fast assembling steel structure lift a safe and reliable, convenient installation, beautiful and practical, let the building to upgrade, allowing people to travel quality guaranteed.



Scan to know more information



## Bed Elevator Car Decoration



## HD-B02

(Optional)

<b>Car wall</b>	Painted steel (Cream-colored)
<b>Ceiling</b>	Painted steel, LED lighting
<b>Handrail</b>	Stainless steel tube
<b>Floor</b>	PVC



## Bed Elevator

Bed elevator often competes with time in vast hospitals, modern medical treatment centers, sanatoriums, medi-care centers etc. where healing the wounded and rescuing the dying are the bounden duties. HENGDA FUJI bed elevator series adhere to the persistently humane thinking, apply fuzzy logic and group supervision technology from expert system, fulfill the intellectual elevator travel and reduce the patients' waiting period to minimum extent.



## HD-B01

(Standard)

<b>Car wall</b>	Hairline stainless steel
<b>Ceiling</b>	Hairline stainless steel, vaulted light board with acrylic (HD-DTA07)
<b>Handrail</b>	Stainless steel flat handrails
<b>Floor</b>	PVC





## Freight Elevator Car Decoration



## HD-H02

(Optional)

<b>Car wall</b>	Hairline stainless steel
<b>Ceiling</b>	Hairline stainless steel
<b>Lighting</b>	Fluorescent lamp
<b>Car door</b>	Hairline stainless steel
<b>Floor</b>	Checked steel plate



## HD-H01

( Standard )

<b>Car wall</b>	Painted steel
<b>Ceiling</b>	Painted steel
<b>Lighting</b>	Fluorescent lamp
<b>Car door</b>	Painted steel
<b>Floor</b>	Checked steel plate

## Freight Elevator

HENGDA FUJI series freight elevator, using the advanced permanent magnet synchronous gearless traction technology, reasonable design, without room; the traction machine has the advantage of light weight, small volume, saving the architectural space, greatly improve the performance and quality of machine room less elevator, reduce energy consumption, the failure rate.

HENGDA FUJI series MRL freight elevator with less shaft height, reduce the design height of the factories and other buildings, can meet the actual needs of the enterprise. To be the best choice for the transportation of goods, such as factories, warehouses, department stores, property centers, libraries and so on.


## Car Elevator

With economic development, people's living quality is keeping to improve, the car gradually into the homes of ordinary families. HENGDA FUJI series car elevator, make full use of HENGDA FUJI years car elevator technology, combined with the domestic market and the development of the machine room car elevator and machine roomless car elevator.

HENGDA FUJI machine room car elevator sare using the latest VVVF technology dedicated to the transport car elevator and overall elevator system to improve floor less restricted, and ensure the millimeter accurate flat layer, comfortable, low noise, technology innovation, further reducing the energy consumption of more than 30%.

HENGDA FUJI machine roomless car elevator are using machine roomless configuration, under special circumstances provides a flexible solution for designers. The intelligent microcomputer control system, high strength and strong design, avoided by car to uneven traction system load increase and produce noise and capsules jitter, make the discrepancy of the car more safe. Car elevator is widely used in the parking lot, garage, underground garage and other places.


# Freight Elevator Decoration

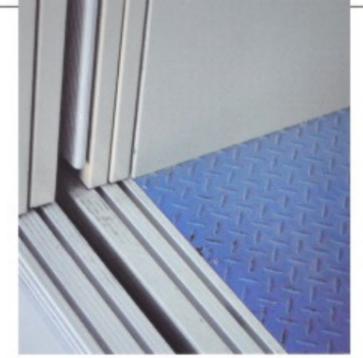

## Hall door Series




Center opening



Side opening



Double-folded center opening type



3-folded center opening type

## Control operation panel and hall buttons

Simple and elegant buttons handling facility, matching the diversified and personalized cabin to a greater extent.




HD-H01C



HD-H01X

## Floor optional

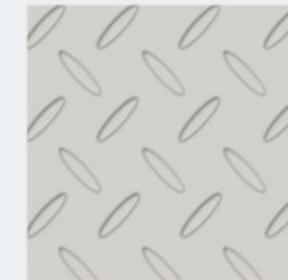

**HD-HDB01**  
Checked steel plate

## Crash barrier elevator



Wooden



Black rubber

The pictures are plotted by computer and are likely somewhat different from the actual products.

## Integrated control box

**FHSP50**  
HENGYUN series lift (Standard)



HD-C12



Blue liquid crystal  
(optional)



FJ-X20A

No bottom box calling  
Anti-fingerprint stainless steel



HD-XBZ5A

## Split operating panel

**FHSP50**  
HENGYUN series lift (Optional)



HD-CBZ5A



HD-XBZ5A

No bottom box calling



HD-CBZ1



HD-XBZ1

No bottom box calling

## Integrated control box

**FHSP30**  
HENGAN series lift (Standard)



HD-C12

HENGAN series lift  
(standard)



HD-X06B

No bottom box calling


Multimedia display of COP (Optional)



FFA-YD360-7D



FFA-YD360-8D



FFA-YD360-104D

Suspension operation  
panel for disabled



HD-C04

Handrail series

FJ-FS01



FJ-FS02



FJ-FS04



Optional  
colors



Green

HD-01



Light gray

HD-02



Bone color

HD-03



Apple green

HD-04



Sea blue

HD-05



Silver gray

HD-06



Cream colored

HD-07

# Passenger Elevator Operation Panel Series(optional)



FJ-C01



FJ-X01A  
No bottom box calling (simplex)



FJ-C02




FJ-X02B  
Hall call box (duplex)




FJ-X02A  
Hall call box (simplex)

## » Direction lantern

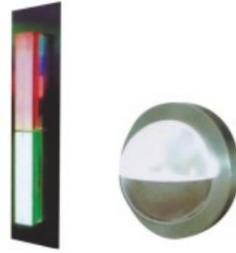

FJ-DL01 FJ-DL02



FJ-DL03 FJ-DL04

## » Hall indicator



FJ-LCDA

## » Hall call box (no indicator)



FJ-LCDB



FJ-C03

## » Optional C.O.P LCD



FJ-X03A



FJ-X03B



FJ-C06



FJ-X06B

## Hall call box(simplex)



FJ-X06A


## Hall call box(duplex)

● Front wall integrated operation panel(optional)/ fault code display,optional dot matrix

● Material:Titanium gold stainless steel mirror

● Material: Blak Titanium-gold

# Passenger Elevator Ceiling Series

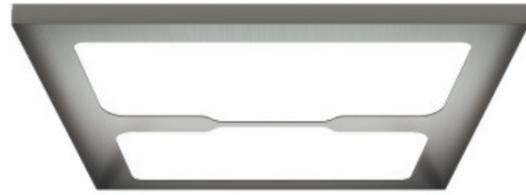

**HD-DTA01**

Diamond silver painted steel with acrylic photic board.



**HD-DTA02**

Mirror stainless steel framework, acrylic arched top plate, LED light



**HD-DTA03**

Stainless steel mirror base-plate is supplemented by rectangle hollow transparent pole. The soft lighting design of arched white light-passing board is in the middle part



**HD-DTA04**

Mirror stainless steel framework, acrylic arched top plate, intermediate down lamp decoration



**HD-DTA05**

Mirror stainless steel framework, acrylic arch paint-jet top plate in middle acrylic lighting decoration on both sides



**HD-DTA06**

Stainless Steel Mirror finish framework with acrylic arched paint-jet top plate in middle with acrylic lighting decoration on both sides




**HD-DTA07**

Hairline stainless steel, Vaulted light board with acrylic




**HD-DTA08**

Painted steel plate, stainless steel hairline, return light

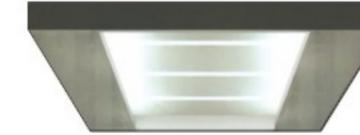

**HD-DTA09**

Acrylic transparent panel with metallic paint

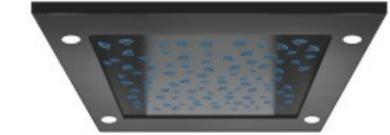

**HD-DTA10**

Black titanium mirror stainless steel frame, down lamp, top panel LED discolor lighting



**HD-DTA11**

Acrylic lighting decoration, stainless steel mirror



**HD-DTA12**

Acrylic lighting decoration, stainless steel hairline, down lamp



**HD-DT01**

Steel plate plastic jetting frame with acrylic lighting cover. Intermediate circular translucent lighting is used.



**HD-DT04**

Stainless steel mirror base-plate is supplemented by rectangle hollow transparent pole. The soft lighting design of arched white light-passing board is in the middle part



**HD-DT07**

Stainless steel mirror hollow plate and white organic board, with stainless steel frame



**HD-DT08**

Video vault in the middle, on both sides of the stainless steel floor with leds light lighting design




**HD-DT09**

Mirror frame, supplemented by leds on mirror stainless steel plate, the middle section is arched white plate light lighting design



**HD-DT10**

Stainless steel mirror base-plate is supplemented by rectangle hollow transparent pole. The soft lighting design of arched white light-passing board is in the middle part

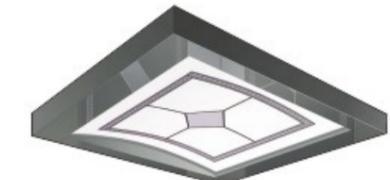

**HD-DT11**

Mirror frame, supplemented by leds on mirror stainless steel plate, the middle section is arched white plate light lighting design

# Passenger Elevator Landing Door Series (optional)



**FJ-MA01**

Mirror, etched  
(optional Titanium gold mirror, etched)



**FJ-MA02**

Mirror, etched, Stainless steel  
(optional Titanium gold mirror, etched)



**FJ-MA03**

Mirror, etched, Stainless steel  
(optional Titanium gold mirror, etched)



**FJ-MA07**

Mirror, etched, titanium gold  
(optional stainless steel mirror, etched)



**FJ-MA08**

Titanium gold, Mirror, etched,  
Stainless steel, And grain  
(optional stainless steel mirror, etched)



**HD-M01**

Mirror, etched, Stainless steel



**FJ-MA04**

Titanium gold, etched,  
(optional stainless steel mirror, etched)



**FJ-MA05**

Mirror, etched, rose gold  
(optional stainless steel mirror, etched)



**FJ-MA06**

Mirror, etched, rose gold  
(optional stainless steel mirror, etched)



**HD-M02**

Mirror, etched, Stainless steel, Golden recess



**HD-M03**


Mirror, etched




**HD-M04**

Mirror, etched, Spraying


## Passenger Elevator Floor Decoration PVC (optional marble)

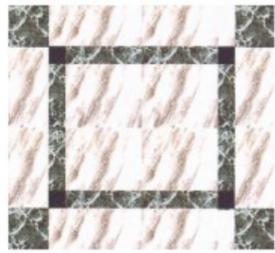


FJ-B01(PVC)  
FJ-B01D(Marble)

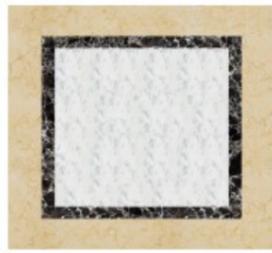


FJ-B02(PVC)  
FJ-B02D(Marble)

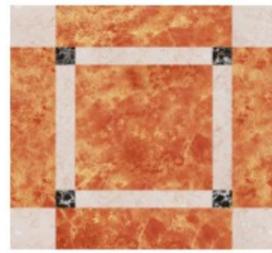

FJ-B03(PVC)  
FJ-B03D(Marble)

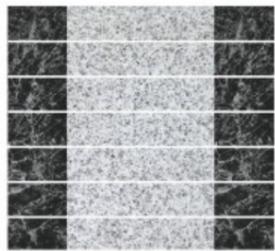


FJ-B04(PVC)  
FJ-B04D(Marble)

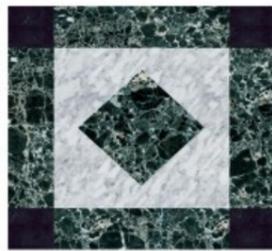


FJ-B05(PVC)  
FJ-B05D(Marble)



FJ-B06(PVC)  
FJ-B06D(Marble)

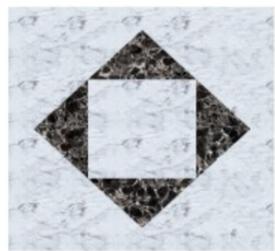

FJ-B07(PVC)  
FJ-B07D(Marble)

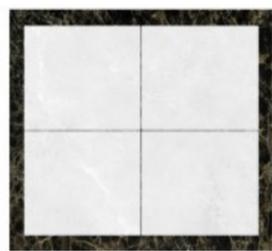

FJ-B08(PVC)  
FJ-B08D(Marble)



FJ-B09(PVC)  
FJ-B09D(Marble)



FJ-B10(PVC)  
FJ-B10D(Marble)



FJ-B11(PVC)  
FJ-B11D(Marble)



HD-DB05(PVC)  
HD-DB05D(Marble)



HD-DB06(PVC)  
HD-DB06D(Marble)

## Passenger Elevator Handrail Series (optional)



FJ-FS01



FJ-FS02



FJ-FS03



FJ-FS04



HD-F03

FJ-FS01:Stainless steel handrail

FJ-FS02:Chromed steel base,central material is acrylic crystal handrail

FJ-FS03:Titanium-gold and stainless steel handrail base,central material is solid wood

FJ-FS04:Stainless steel flat handrail

HD-F03:Triple combination mirror stainless steel tube

### Optioal colors



HD-01



HD-02



HD-03



HD-04



HD-05



HD-06

Note: There might be slight difference between the samples and real products, please take the real products as criterion.

# Passenger Elevator Function

## Standard Function

Full collective control	Controller Winll Automatically Select The Nearest Elevator Responding Passenger's Call.
Inspection operation	Automatically Move To The Nearest Leveling In A Slow Speed.
Automatic backplane	In normal condition The Elevator will automatically move to the nearest leveling in a slow speed.
Automatic door opening	Elevator open the door automatically.
Automatic door opening time adjustment	Door remaining open for a short time in normal condition.
Door opening button (external)	Door remaining open when the door opening button was pushed on.
Door pre closing function	To make door close immediately in normal opening condition.
Door opening button (internal)	To make door open or re open when elevator stops.
Full load bypass	When the elevator is fully loaded, it will travel to destination without responding to calling outside.
Automatic turn off lighting and fan	Lighting and fan will cut off power automatically without any call or indication in 3 minutes.
Automatic return to home landing	In normal condition, the elevator will return to home landing without any more calls or indications.
Door re closing	The door will try to close again when it is blocked.
Error recording	Mainboard can record 10 errors at most.
Hoistway self learning	Elevator can learn the data and situation automatically before using.
Attendant service	The lift is close by continued pressing close buttons.
Bypass operation	Elevator will travel directly to destination without stopping.
Automatic correction of floor position signal	Self correcting the data when the elevator reach final limit switch.
Lift locking	Lock the elevator and turn off the power so that no one can use it.
Protection of door lockup outside door area	No door opening when it is not in leveling position.
Infrared light curtain protection	Door will opening when it is blocked.
Over load protection	Elevator refuse to travel with buzz when it is overloaded.
Reversal running protection	When the running direction is different with destination direction, it stops automatically.
Anti skip protection	Travelling a long time without door opening, it will stop automatically.
Anti terminal over running protection	Security risks are prevented by preventing the continued operation of the failure of the terminal switch.
Phase protection	Stop to move when the final limit switch fails to have function.
Phase protection	The elevator will stop with wrong phase or lack phase.
Contact protection	Stop running when safety devices conflict.
Failure analysis of shaft self learn	When the shaft learned by itself that it doesn't finish it correctly.
Motor temperature protection	Protect the motor from being over heat.

## Standard Function


Door opening failure protection	Stop running when error happens to door.
Protection for door lock short circuit	Elevator refuse to move when error suddenly happens to the brake.
Door lock failure for brake switches	Elevator will stop at once when error suddenly happens to door lock.
Over speed protection	In case of elevator running too fast.
Contact protection for brake switches	Protect the elevator when error happens to the brake.
Five - party interphone communication	Communication for machineroom, car top, car cage, pit and inspection station.
Wheeling protection	Safety protection in rescuing.
Alarm bell	When the anomaly occurred, passenger in the cabin can notice the outside with this device.
Emergency lighting	When the power supply is failure, it can provide the lighting of the car.
Two doors operator	Only for opening through door opening type.
Level switch protection	It is a safety protection in case of the trouble in leveling switch.
False call canceling	When the passengers press the false button, it can cancel the call through the two times press.
Automatic reversal call canceling	When the running direction is different with destination direction, it stops automatically.
Floor display directional setup	Directional setup of service floor.
Isolate running	Operation similar to attendant service function.
Segment code or dot matrix floor indicator	The indicator displayed in matrix type.
Rolling display of running direction	The running direction display in a rolling way.
Forced door closing	The door nudging device will force the door closing when it open too long.
CAN communication protection	Prevent the danger in case of trouble.
Arrival gong	Sound to indicate leveling is finished.
Emergency return in case of fire	The elevator will return to home floor in a short time when fire emergency happens.
Main control protection	Stop the running of the elevator in case of trouble.
Main control CPU WDT protection	When test the trouble of CPU, WDT make it reset.
Discretionary setup of service floor	Using the operator to setup the landing floor discretionally.
Test running	It is used for testing the new elevator.
Clock control	It can record the time of trouble, and decide to stop at any floor.
Direct landing	The efficiency of the elevator can be improved by the distance principle to deceleration.
Load weighing device	With such system, the elevator can self learn the data to improve the start up.
Parallel control	Two elevator through the CAN serial communication bus to coordinate the call.
Protection device for accidental movement of the car	In case of accidental movement that the car leaves the landing floor while the landing door is unlocked as well as the car door keeps open, protection device to prevent or stop such movement should be equipped.
Bypass protection	Bypass protection provides safety protection for daily maintenance.

# Freight Elevator Function

# Machine Roomless Passenger Elevator Construction Layout Drawing

## Standard Function

IC card management	Users can control the certain floors with this card.
Voice announcer	Voice announcement for running situation.
Automatic rescue device(ARD)	The elevator will automatically run to the nearest door zone when the power supply fails.
Advance door opening	In process of leveling, the distance is right, and the speed is little than the regulated one, the door will open in advance.
Arrival forecasting light	Flashing when the elevator is leveling, to remind the passenger that it will landing.
Arrival chime	It can ring when the elevator is landing.
Remote monitoring	It can monitoring the running situation of elevator.
Earthquake shutdown function	When the earthquake device is moving, the elevator will landing ai the nearest floor , and open the door.
Fireman operation	Firemen can use this elevator to travel to destination without respoding to calling outside.
Self re leveling	When the leveling is not accurate. it will re leveling automatically.
Sub control panel	It just like the main accurate, it will re leveling automatically.
Rear car operational panel	It control the rear opening and close.
The handicapped car operational panel	It specially desinged for the handicapped people.
Group control	Through the group control to coordinate the running of many elevator.
The service for the rush hour of go to work	Only for group control, when the elevatorm runs up from home floor with 3more instructons, and other elevator in response to instructions and calls will automatically return to home floor and open doors
The service for the rush hour of off work	Only for group control, when the elevator runs comes down from home floor with 3more instructons. andother elevator in response to instructions and calls will automatically return to home floor and open doors.
Dispersed waiting	Only for group control, when the elevator stops running in a specified time, the elevator will return to the pre setting floor to shorten the call time for warios floors to improve efficiency
Isolated control of front and rear door	There are two kinds: one is the rear car operational board, the other is the call box outside the rear door.
Anti nuisance operation	It can cancel the disturbance instruction.
VIP service	It can cancel all the instruction and call until the VIP arrives the certain stop without any other stop.
Door remaining open function	Keep press the door open button to delay of door closing.
LCD indicator	It can clearly indicate the floors and other information.

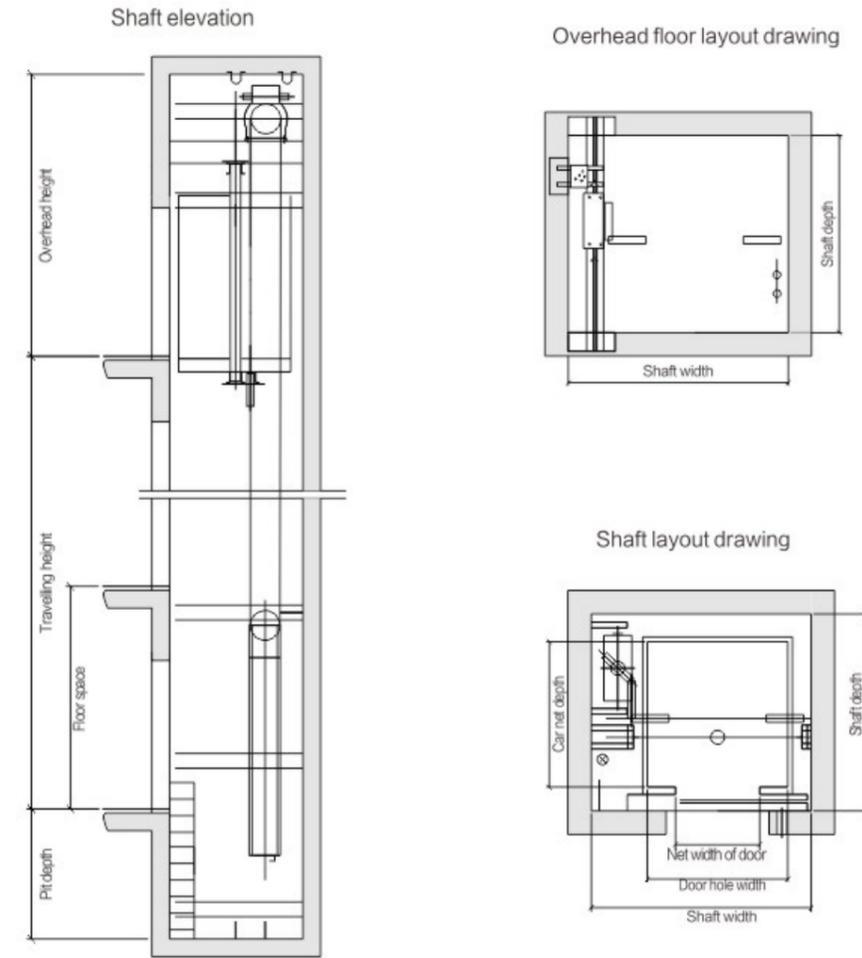


Machine roomless passenger specifications

Persons	Rated capacity (kg)	Rated speed (m/s)	Net size of car (mm)	Net size of door D.W x D.H (mm)	Shaft size (mm)		
			C.W x C.D x D.H	2P Central opening	H.W x H.D	HR.H	PIT
6	450	1.0	1100x1100x2300	800x2100	2050x1850	4200	1500
8	630	1.0	1400x1100x2300	800x2100	2250x1900	4200	1500
		1.5/1.75				4400	1600
10	800	1.0	1400x1350x2300	800x2100	2250x1950	4200	1500
		1.5/1.75				4400	1600
		2.0				4800	1800
		2.5				2000	
13	1000	1.0	1500x1550x2300	900x2100	2350x2150	4200	1500
		1.5/1.75				4400	1600
		2.0				4800	1800
		2.5				4800	2000
21	1600	1.0	1900x1800x2300	1100x2100	2850x2400	4500	1500
		1.5/1.75				4700	1600
		2.0				4900	1800
		2.5				5100	2000
26	2000	1.0	1900x2200x2300	1100x2100	2900x2600	4500	1500
		1.5/1.75				4700	1600
		2.0				4900	1800
		2.5				4900	1800

Note: Only for reference, final manufacture please follow contract.

# Small Machine Room Elevator Construction Layout Drawing

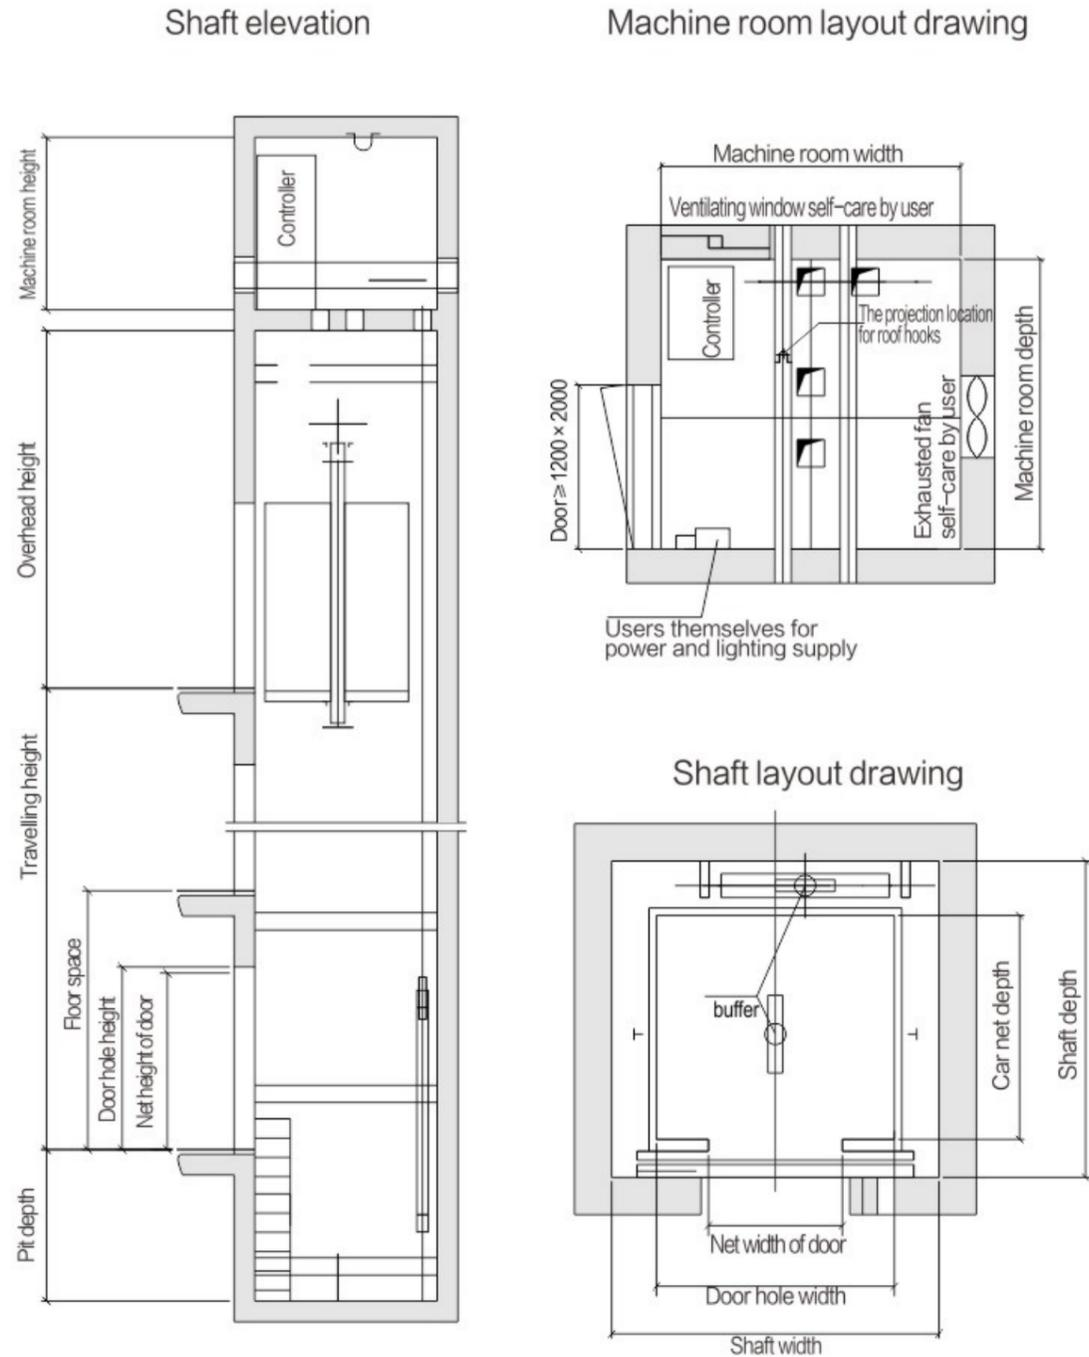



Small machine room passenger specifications

Persons	Rated capacity (kg)	Rated speed (m/s)	Net size of car (mm)	Net size of door D.W x D.H (mm)	Shaft size (mm)			Machine room size (mm)	
			C.W x C.D x D.H	2P Central opening	H.W x H.D	HR.H	PIT	MR.W x MR.D	MR.H
6	450	1.0	1400x850x2300	800x2100	2000x1800	4000	1500	2000x1800	2500
		1.5/1.75				4400			
8	630	1.0	1400x1100x2300	800x2100	2000x2050	4200	1600	2000x2050	2500
		1.5/1.75				4400			
10	800	1.0	1400x1350x2300	800x2100	2000x2300	4200	1800	2000x2300	2500
		1.5/1.75				4400			
		2.0				4800			
		2.5				2000			
13	1000 (1050)	1.0	1600x1450x2300 1100x2300x2300 (Residence / stretcher elevator)	900x2100	2200x2400 2050x2850 (Residence / stretcher elevator)	4200	2000	2200x2400 2050x2850 (Residence / stretcher elevator)	2500
		1.5/1.75				4400			
		2.0				4800			
		2.5				5200			
		3.0				5500			
		3.5				6000			
16	1250	1.0	1900x1450x2300	1100x2100	2500x2400	4200	2000	2500x2400	2500
		1.5/1.75				4400			
		2.0				4800			
		2.5				5200			
		3.0				5500			
		3.5				6000			
18	1350	1.0	1900x1550x2300	1100x2100	2500x2500	4200	2000	2500x2500	2500
		1.5/1.75				4500			
		2.0				4800			
		2.5				5200			
		3.0				5500			
		3.5				6000			
21	1600	1.0	1900x1800x2300	1100x2100	2500x2800	4200	2000	2500x2800	2500
		1.5/1.75				4500			
		2.0				4800			
		2.5				5200			
		3.0				5500			
		3.5				6000			
		4.0				6000			
		6.0				2700x2900			
10.0	2800x3000	8800	7200	4300x3000	3800				
26	2000	1.0	1900x2200x2300	1100x2100	2700x2800	4500	1800	2700x2800	2500
		1.5/1.75				4700			
		2.0				5000			
		4.0				6000			
		6.0				6400			
		8.0				7500			
		10.0				8800			
26	2000	1.0	1900x2200x2800	1100x2100	3200x3000	4500	6000	4700x3300	3800
		1.5/1.75				4700			
		2.0				5000			
		4.0				6000			
		6.0				6400			
		8.0				7500			
		10.0				8800			

Note: Only for reference, final manufacture please follow contract.

# Semicircle Observation Elevator Construction Layout Drawing

# Square Observation Elevator Construction Layout Drawing

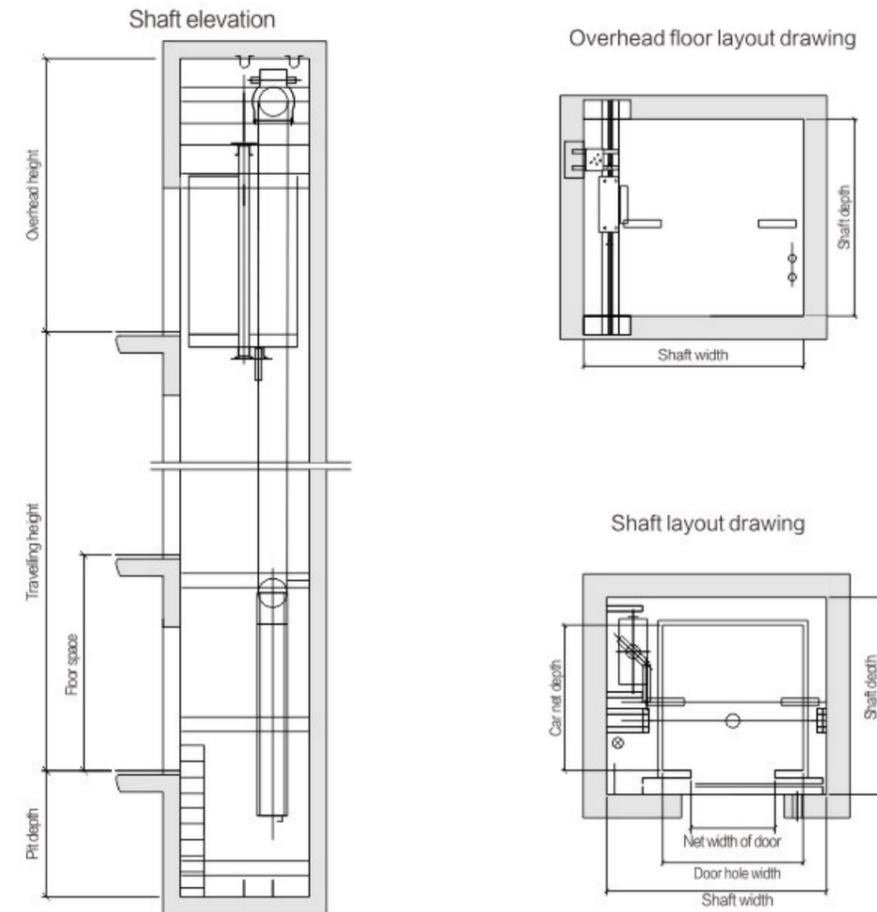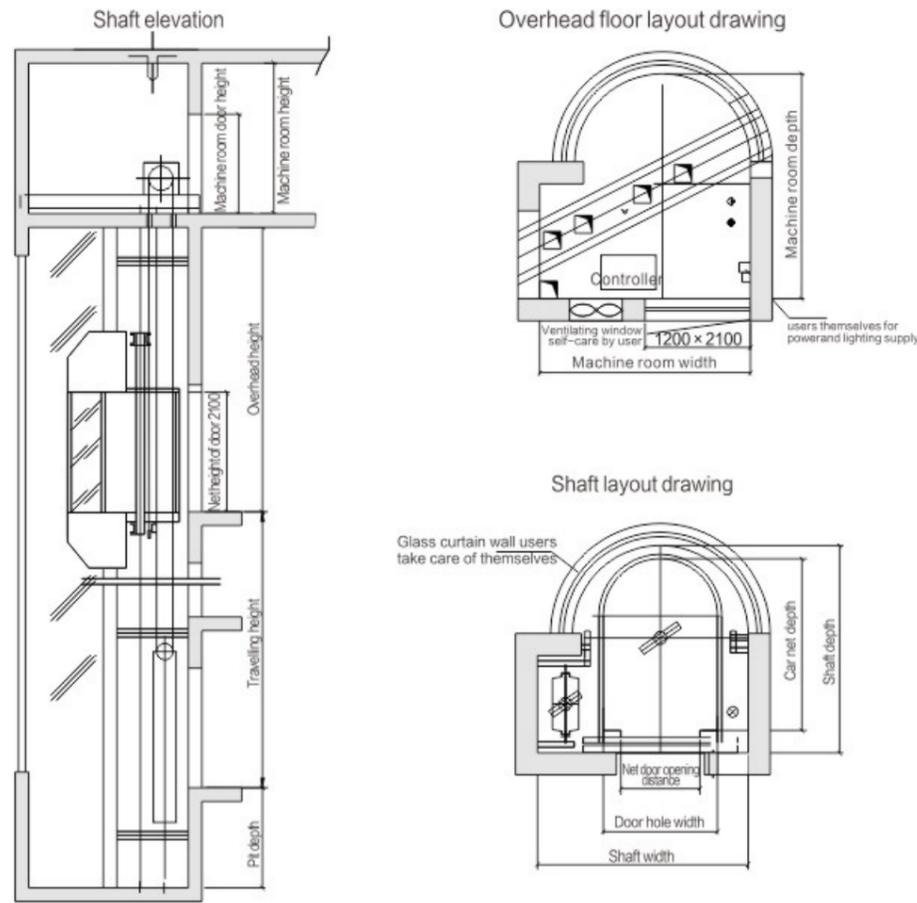

Semicircle machine room / Machine roomless elevator specifications

Persons	Rated capacity (kg)	Rated speed (m/s)	Net size of car (mm)		Shaft size (mm)			Machine room size (mm)	
			C.W x C.D x D.H	2P Central opening	H.W x H.D	HR.H	PIT	MR.W x MR.D	MR.H
8	630	1.0	1100x1600x2300	700x2100	2200x2185	4500	1500	2200x2185	2500
		1.5/1.75				4700	1600		
10	800	1.0	1200x1800x2300	800x2100	2300x2355	4500	1500	2300x2355	2500
		1.5/1.75				4700	1600		
		2.0				4900	1800		
		2.5				5100	2000		
13	1000	1.0	1300x1950x2300	900x2100	2400x2535	4500	1500	2400x2535	2500
		1.5/1.75				4700	1600		
		2.0				4900	1800		
		2.5				5100	2000		
16	1250	1.0	1400x2150x2300	900x2100	2500x2600	4500	1500	2500x2600	2500
		1.5/1.75				4700	1600		
		2.0				4900	1800		
		2.5				5100	2000		
18	1350	1.0	1500x2150x2300	1000x2100	2600x2600	4500	1500	2600x2600	2500
		1.5/1.75				4700	1600		
		2.0				4900	1800		
		2.5				5100	2000		
21	1600	1.0	1500x2450x2300	1000x2100	2600x2900	4500	1500	2600x2900	2500
		1.5/1.75				4700	1600		
		2.0				4900	1800		
		2.5				5100	2000		
		3.0				5200	2600		
		4.0				6000	3850		
26	2000	1.0	1700x2600x2300	1100x2100	2800x3050	4500	1500	2800x3050	2500
		1.5/1.75				4700	1600		
		2.0				4900	1800		
		3.0				5200	2600		
		4.0				6000	3850		

Note: Only for reference, final manufacture please follow contract.


Square machine room / Machine roomless elevator specifications

Persons	Rated capacity (kg)	Rated speed (m/s)	Net size of car (mm)		Shaft size (mm)			Machine room size (mm)	
			C.W x C.D x D.H	2P Central opening	H.W x H.D	HR.H	PIT	MR.W x MR.D	MR.H
6	450	1.0	1100x1100x2300	800x2100	2050x1850	4200	1500		
8	630	1.0	1400x1100x2300	800x2100	2250x1900	4200	1500	/	/
		1.5/1.75				4400	1600		
10	800	1.0	1400x1350x2300	800x2100	2250x1950	4200	1500	/	/
		1.5/1.75				4400	1600		
		2.0				4800	1800		
		2.5				4800	2000		
13	1000	1.0	1500x1550x2300	900x2100	2350x2150	4200	1500	/	/
		1.5/1.75				4400	1600		
		2.0				4800	1800		
		2.5				4800	2000		
21	1600	1.0	1900x1800x2300	1100x2100	2850x2400	4500	1500	/	/
		1.5/1.75				4700	1600		
		2.0				4900	1800		
		2.5				5100	2000		
		3.0				5200	2600		
		4.0				6000	4900		
26	2000	1.0	1900x2200x2300	1100x2100	2900x2600	4500	1500	/	/
		1.5/1.75				4700	1600		
		2.0				4900	1800		
		3.0				5200	2600		
		4.0				6000	4900		
								1900x1800x2800	1100x2100
			1700x2600x2300	1100x2100	2800x3050	5200	2600	2800x3050	2500
			1900x2200x2800	1100x2100	3150x2700	6000	4900	3150x2700	2800

Note: Only for reference, final manufacture please follow contract.

# Villa Elevator Construction Layout Drawing


# Steel Structure Elevator Construction Layout Drawing

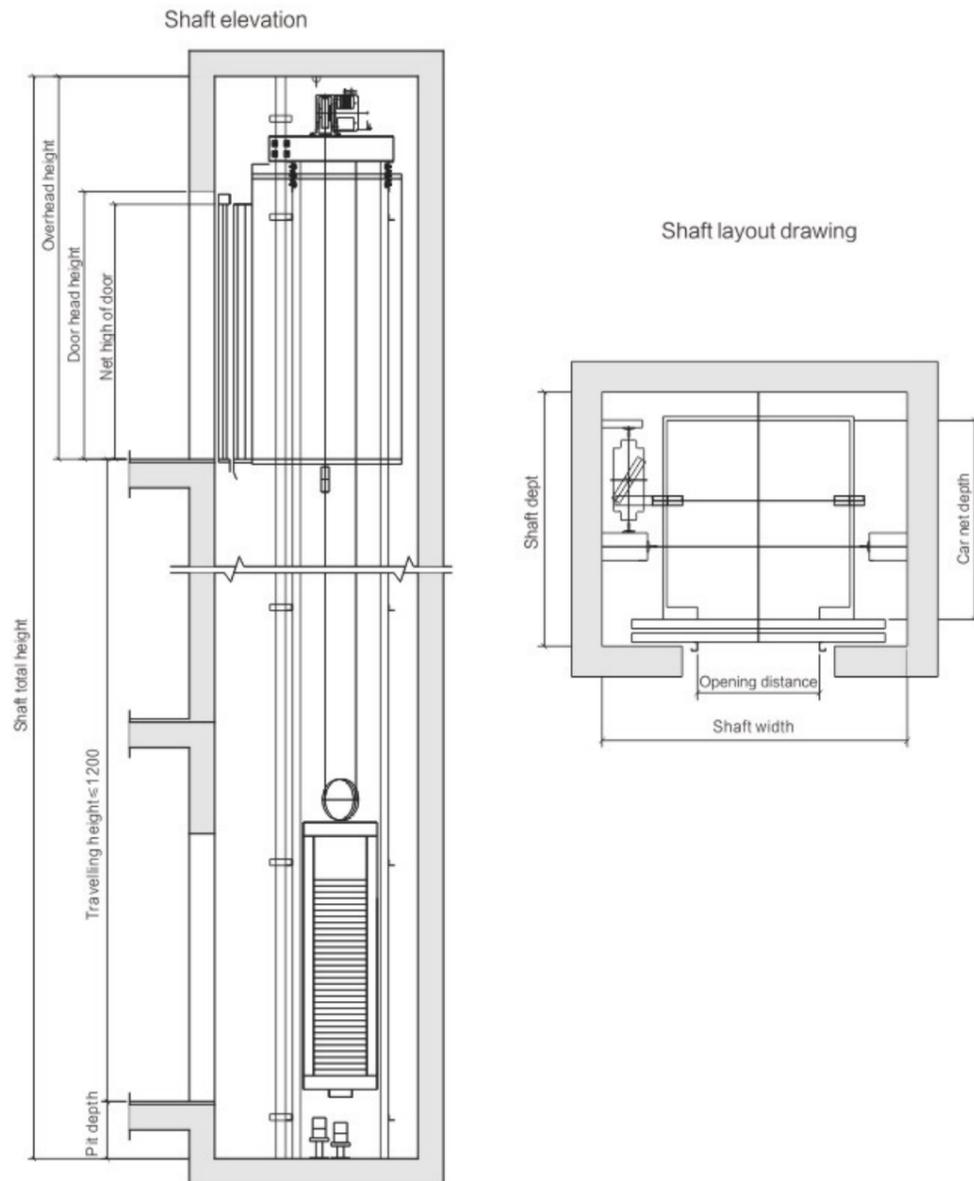

Villa elevator specifications

Persons	Rated capacity (kg)	Rated speed (m/s)	Net size of car (mm)	Net size of door D.W x D.H (mm)	Shaft size (mm)		
			C.W x C.D x D.H	2P Central opening	H.W x H.D	HR.H	PIT
3	260	0.4	800x1150x2200	700x2000 Side door	1400x1500	3500	800
4	320	0.4	950x1300x2200	700x2000	1600x1600	3500	800
5	400	0.4	1200x1300x2200	800x2000	1850x1600	3500	800

Note: Only for reference, final manufacture please follow contract.

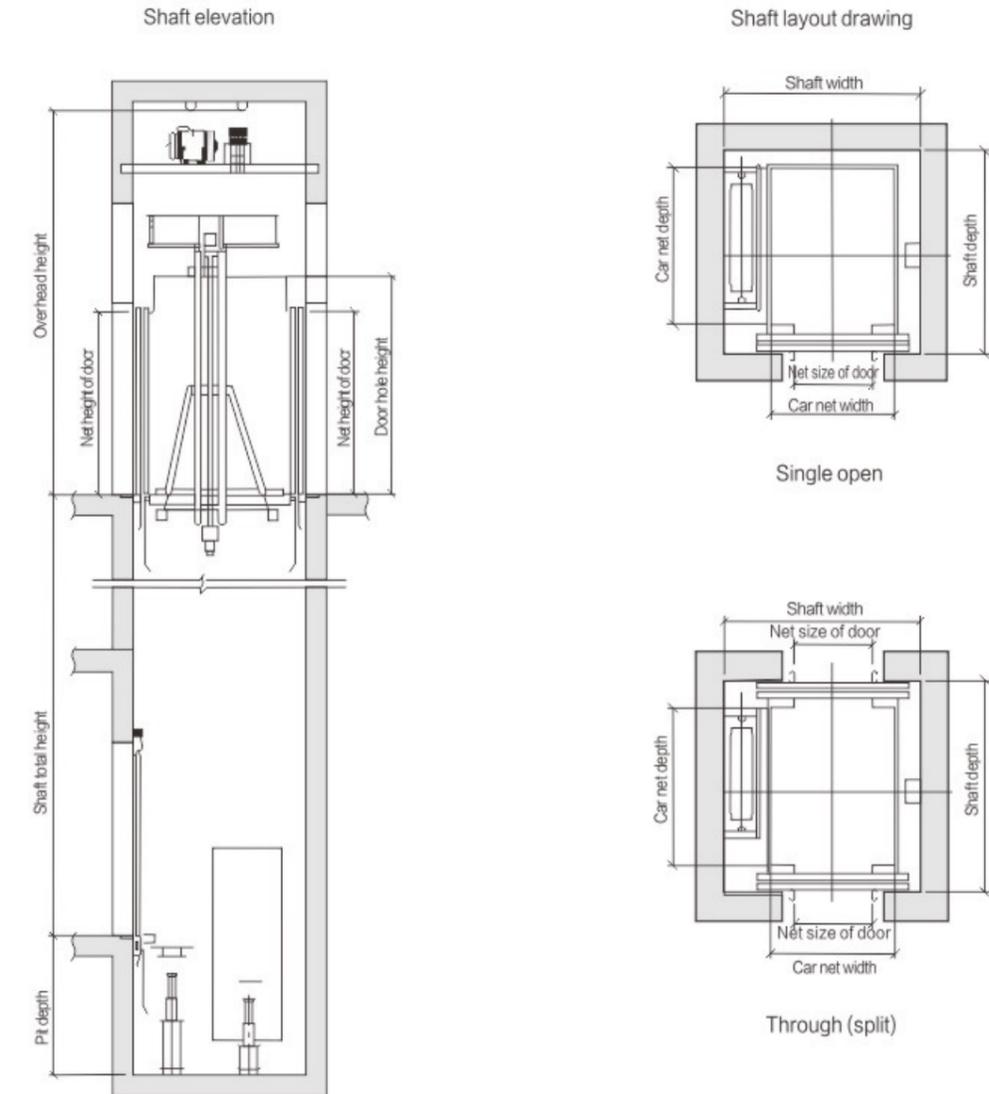


Steel structure elevator specifications


Persons	Rated capacity (kg)	Rated speed (m/s)	Net size of car (mm)	Net size of door (mm)		Shaft size (mm)				
			CW x CD x CH	OP	OPH	HW	HD (Single open)	HD Through (split)	K	S
6	450	1.0	1000x1300x2400	650x2100	1650	1700	1800	4500	1400	
		1.5						4600	1500	
8	630	1.0	1100x1400x2400	700x2100	1750	1800	1900	4500	1400	
		1.5						4600	1500	
10	800	1.0	1350x1400x2400	800x2100	2000	1800	1900	4500	1400	
		1.5						4600	1500	
13	1000	1.0	1500x1550x2400	900x2100	2150	1950	2050	4500	1400	
		1.5						4600	1500	

Note: Only for reference, final manufacture please follow contract.

# Bed Elevator Construction Layout Drawing

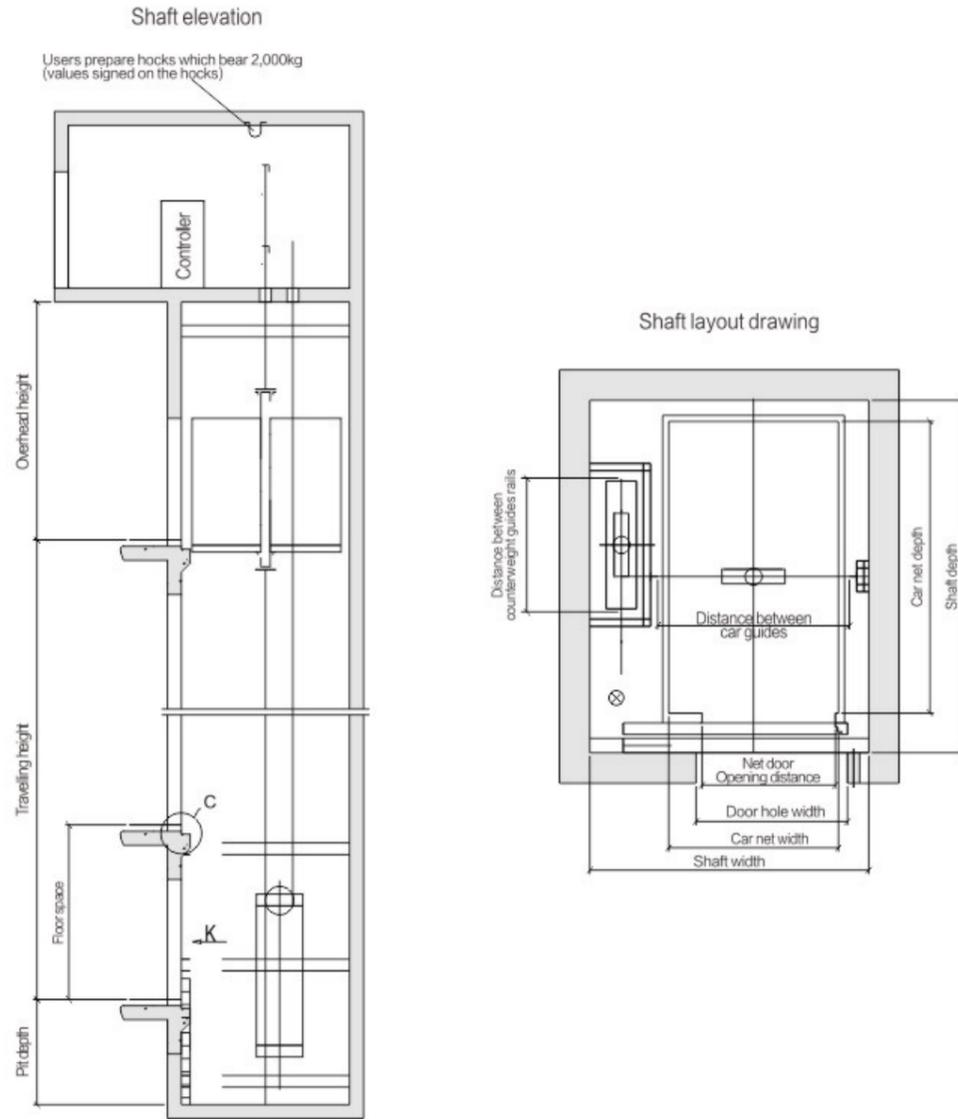

# Freight Elevator Construction Layout Drawing

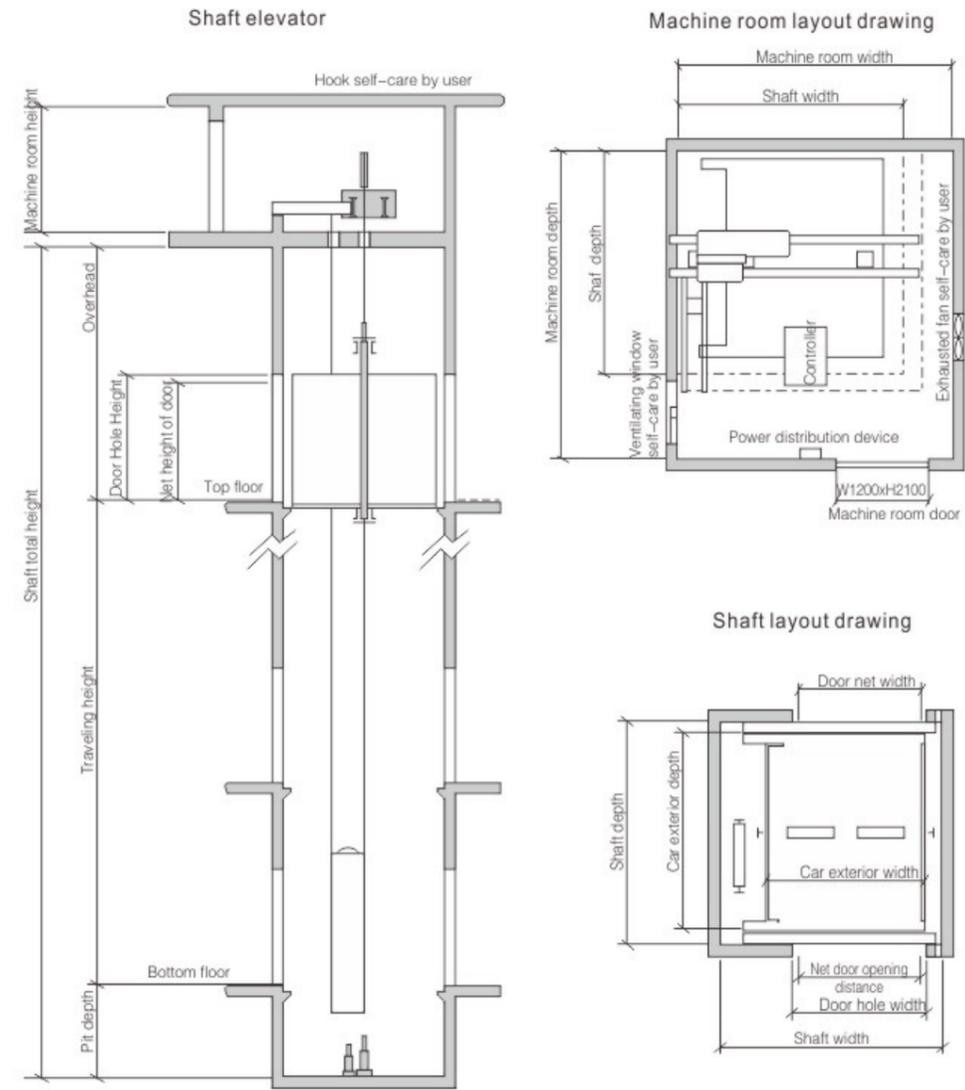

## Freight elevator specifications

Load (kg)	Speed (m/s)	Exterior size of car width x depth x height (mm)	Net door opening width x height (mm)	Shaft Net Size			Machine Room Net Size		Door Open type
				width x depth (mm)	Overhead height	Pit depth	width x depth (mm)	height (mm)	
630	0.5	1200x1500x2200	1100x2100	2100x1860	4200	1500	2500x3000	2200	Two panel side opening
1000	0.5	1500x1800x2200	1200x2100	2250x2160	4200	1500	3000x3000	2200	Two panel side opening
2000	0.5	1570x2900x2200	1500x2100	2700x3260	4200	1500	3500x3000	2500	Two panel side opening
	1.0				4500	1500			
	1.5	2000x2300x2200	2850x2660	4500	1600	Four panel center opening			
	2.0			4800	1800				
3000	0.25	2070x3050x2200	1800x2100	3300x3410	4500	1500	3800x4200	2500	Four panel center opening
	0.5	2070x3100x2200	1800x2100	3300x3460	4500	1500	3800x4200	2500	Four panel center opening
3200	1.0	2070x3100x2200	1800x2100	3300x3460	4500	1500	3800x4200	2500	Four panel center opening
5000	0.25	2800x3400x2500	2000x2200	4200x3800	5000	1600	4200x3800	2800	Four panel center opening
	0.5								
7000	0.25	3000x4200x2500	2600x2400	4500x4600	5000	1600	4500x4600	2800	Four panel center opening
	0.5								
10000	0.25	3070x5760x2500	2600x2400	4900x6200	5000	1600	4900x6200	2800	Four panel center opening

## Machine room / Machine roomless bed elevator specifications



Persons	Rated capacity (kg)	Rated speed (m/s)	Net size of car (mm) C.W x C.D x D.H	Net size of door (mm) D.W x D.H	Shaft size (mm)			Machine room size (mm)	
					H.W x H.D	HR.H	PIT	MR.W x MR.D	MR.H
21	1600	1.0	1400x2400x2300	1100x2100	2550x2900	4500	1500	2550x2900	2500
		1.5/1.75				4700	1600		
		2.0				4900	1800		
		2.5				5100	2000		
24	1800	1.0	1600x2400x2300	1200x2100	2750x2900	4500	1500	2750x2900	2500
		1.5/1.75				4700	1600		
		2.0				4900	1800		
26	2000	1.0	1700x2400x2300	1200x2100	2850x2900	4500	1500	2850x2900	2500
		1.5/1.75				4700	1600		
		2.0				4900	1800		

Note: Only for reference, final manufacture please follow contract.

Note: Only for reference, final manufacture please follow contract.

# Machine Roomless (MRL) Freight Elevator Construction Layout Drawing

# Car Elevator Construction Layout Drawing

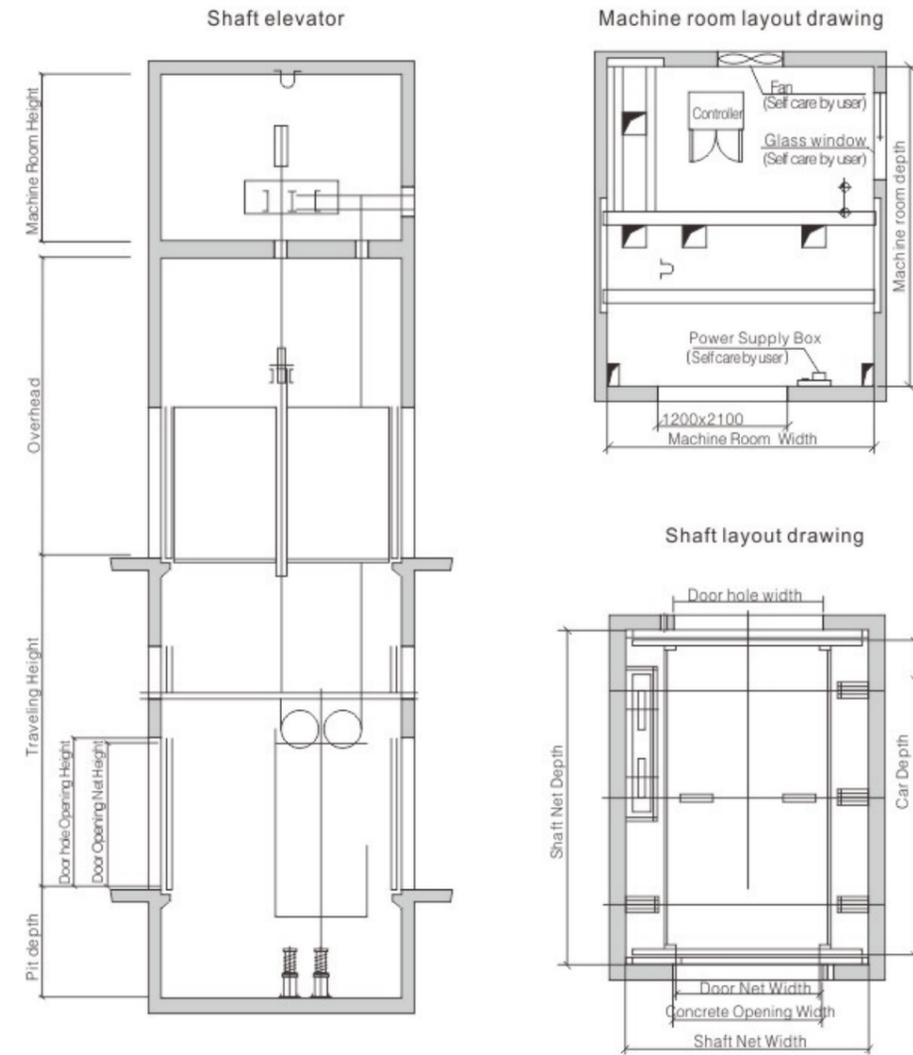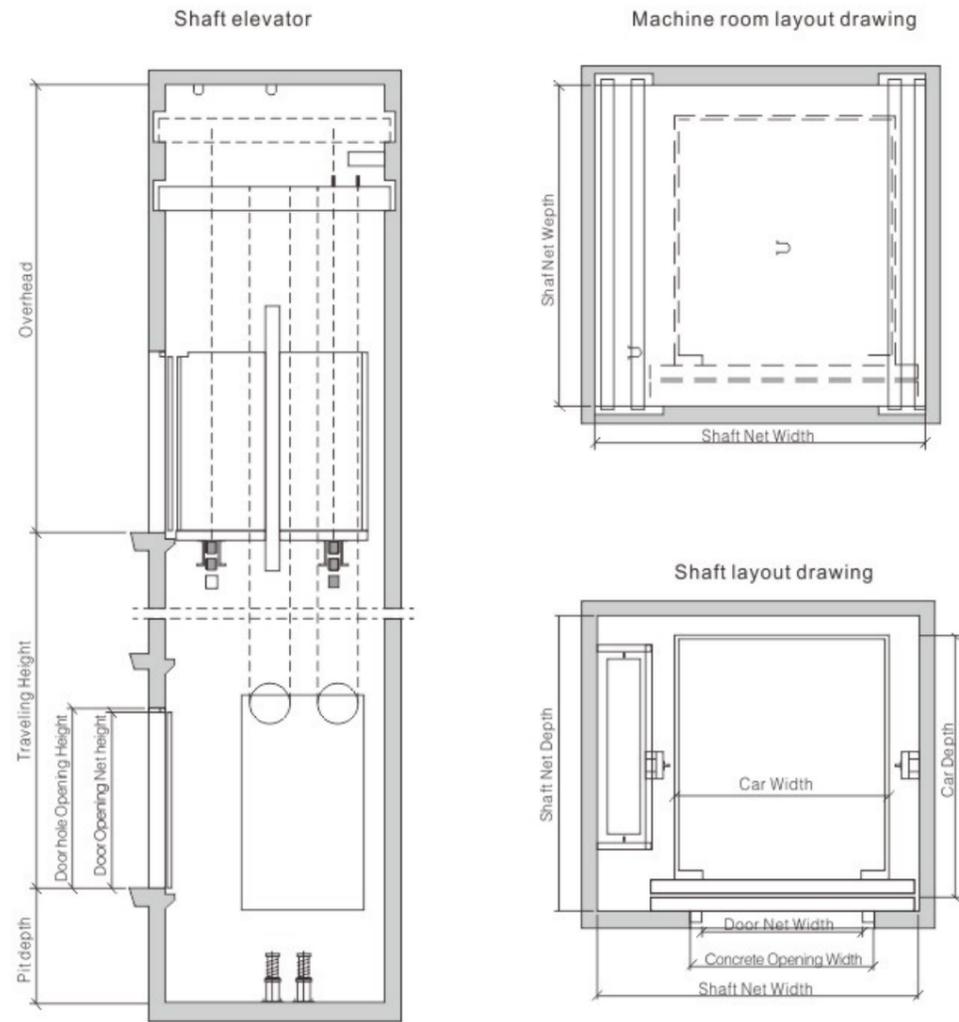

Machine roomless(MRL) freight elevator specifications

Load (kg)	Speed (m/s)	Exterior size of car width x depth x height (mm)	Net door opening width x height (mm)	Shaft Net Size			Door Open type
				width x depth (mm)	Overhead height	Pit depth	
1000	0.5	1500x1800x2200	1200x2100	2250x2200	4500	1500	Two panel side opening
	1.0				4500	1500	
	1.5				4600	1600	
	2.0				4800	1800	
2000	0.5	2000x2300x2200	1500x2100	3150x2660	4800	1500	Two panel side opening
	1.0				5000	1500	
	1.5				5200	1600	
	2.0				5200	1800	
3000	0.5	2470x2560x2200	1800x2100	3700x3000	5000	1600	Four panel center opening
5000	0.5	2800x3400x2500	2400x2400	4250x3800	6100	1600	Four panel center opening

Note: Only for reference, final manufacture please follow contract.

Car elevator specifications

Load (kg)	Speed (m/s)	Door open type	Net door opening width x height (mm)	Exterior size of car width x depth (mm)	Shaft Net Size (mm)			Machine Room Net Size (mm)
					width x depth	Pit depth	Overhead height	width x depth x height
3000	0.25/0.5	Four Panel Center Opening	2400 x 2200	2700 x 5800	4100 x 6160	1600	4800	4100 x 6160 x 2500
5000	0.25/0.5	Four Panel Center Opening	2600 x 2200	3500 x 7200	4750 x 7560			4750 x 7560 x 2500

Note: Only for reference, final manufacture please follow contract.

**Escalator  
Moving walk**



## Aspirations for the future

The exterior design combines modern aesthetic concepts with a variety of handrails and wall panels. The dynamic streamlined shape gives the city a smart rhythm, adding a beautiful landscape to the city's public buildings such as shopping malls, supermarkets and overpasses.



Luxury temperament



The beauty of precision structure



Efficient and safe beauty



The beauty of technology sensing



◎ **Luxury temperament**

Reinforced glass siding, luxurious decoration is superior.

◎ **The beauty of precision structure**

High-strength metal structure, Build precision dimensions, Super-conscious aesthetic design, perfect blend with the building.

◎ **Efficient and safe beauty**

With a faulty display, It can accurately analyze the running status and display it on the screen to ensure timely and effective maintenance.


◎ **The beauty of technology sensing**

With a faulty display, It can accurately analyze the running status and display it on the screen to ensure timely and effective maintenance.

# Comprehensive security system

The HENGDA FUJI escalator series adopts a novel, fashionable and creative design, and quietly waits in every corner of the city in an elegant and atmospheric manner.

The strength of the carrying capacity, all of which highlights its advanced technology, reliable carrying and comfortable ride. Industry-leading innovative technology to achieve safe, energy-saving, environmentally friendly green operation, and promote the sustainable development of the city.

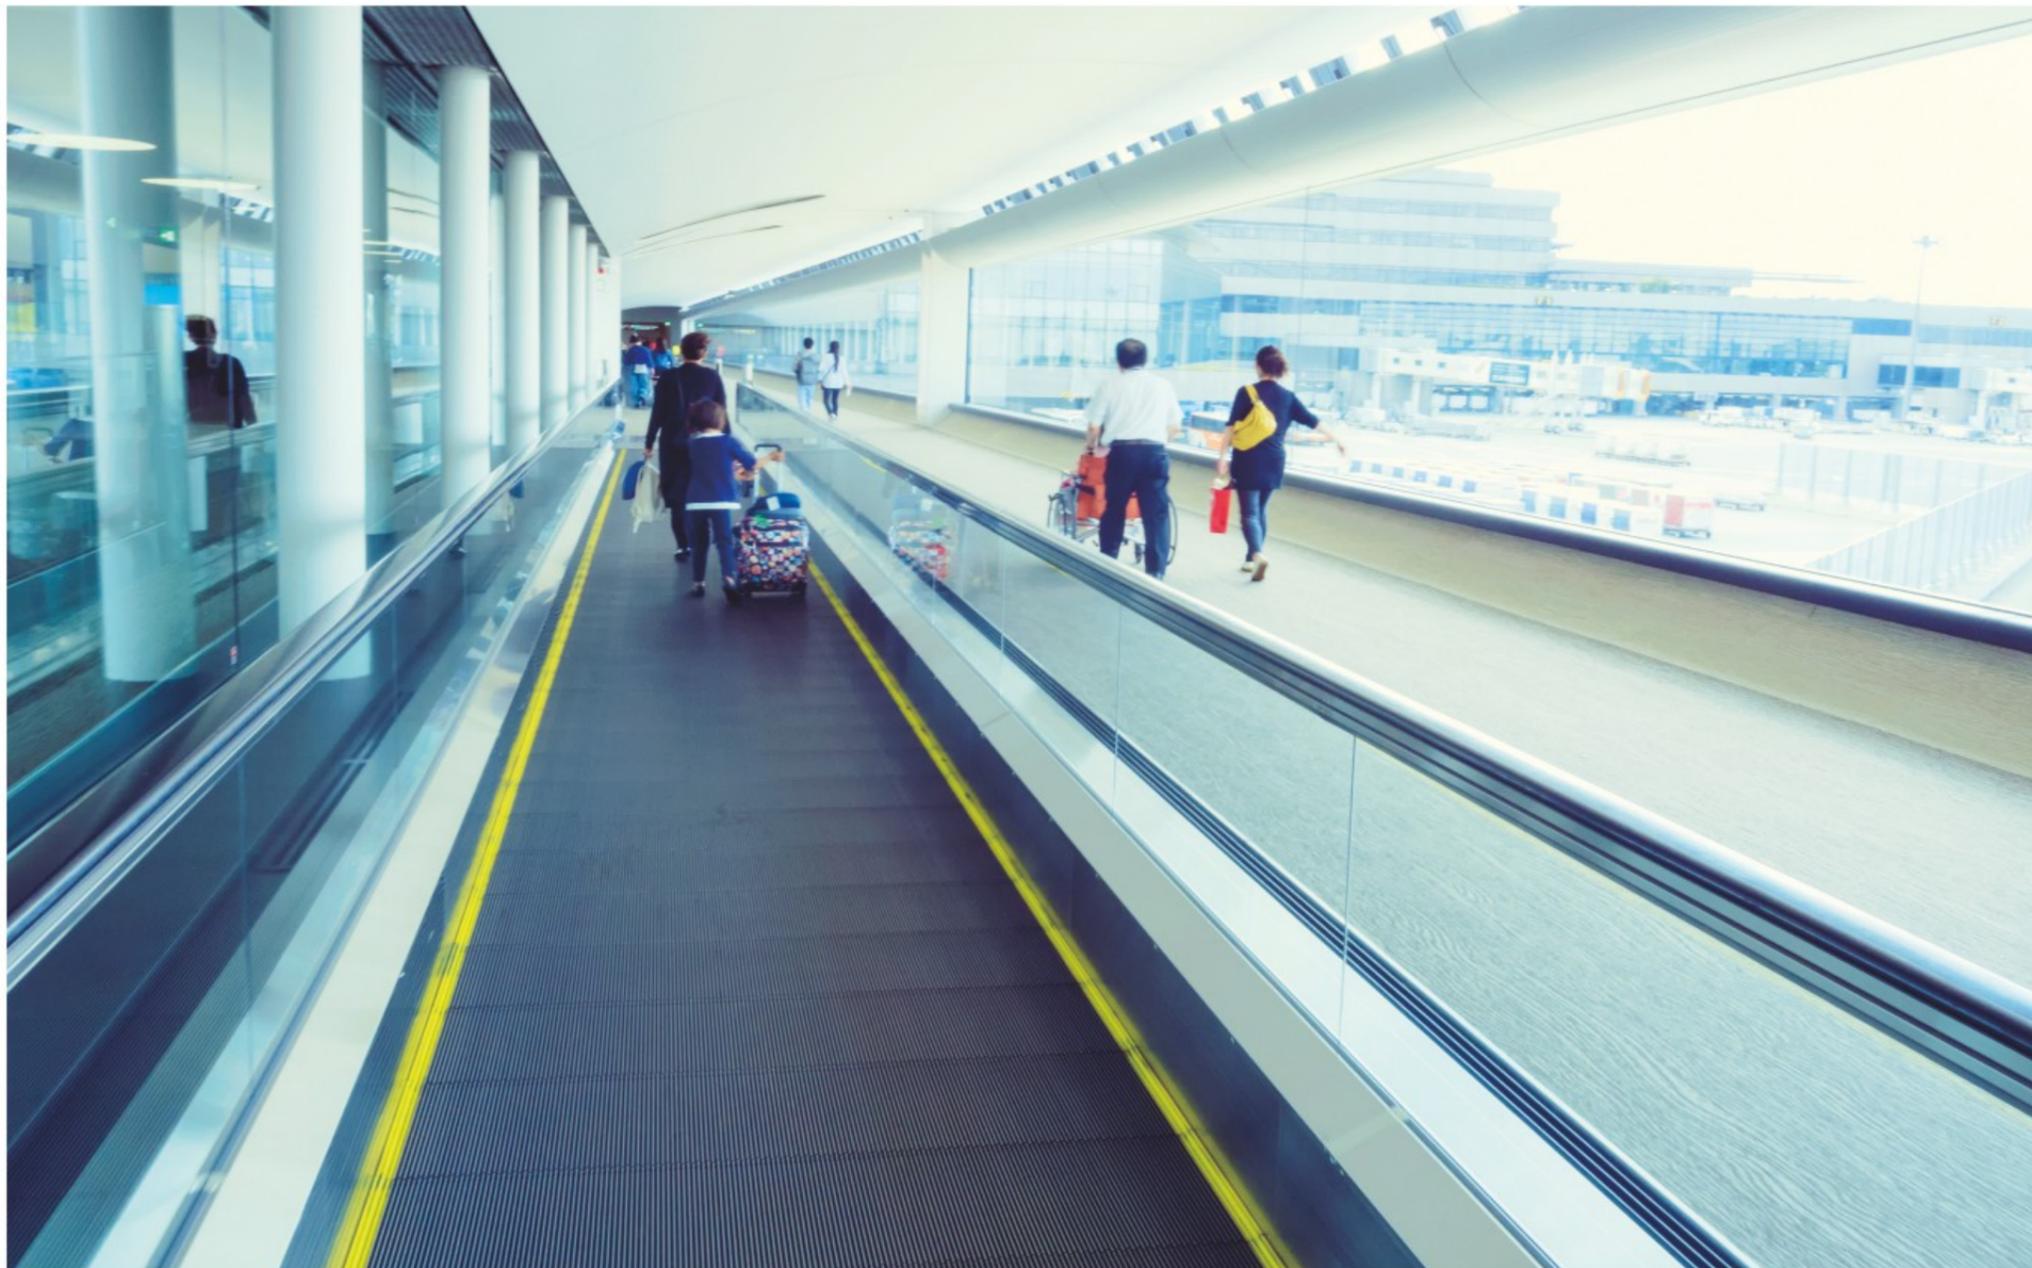


## Energy-saving safety device



The integration of a number of international leading technologies and energy-saving safety devices completely eliminates the conventional hidden dangers of ladder chain looseness, step and apron plates, and comb-tooth plate friction, and regular maintenance to ensure safe and smooth operation.

## Microcomputer control technology



Adopting international leading computer control technology, controlled by CPU motherboard computer, It can fully monitor the running status of the escalator, detect and eliminate potential safety hazards in time, and ensure the safety of passengers.

## Real-time online monitoring




Real-time online monitoring of escalator and sidewalk operations,  
Achieve fault warning,  
Prevent the occurrence of major accidents,  
The first time I found the elevator malfunction,  
The first time to solve the fault.

# 21 national standards development and multiple guarantees for technology patents


Standard safety device		Optional safety device	
15	Cascade collapse protection device	22	Additional brake (H>6m must be equipped)
16	Warning line	23	Lower machine room drainage
17	Handrail speed monitoring	24	Lower machine room water level detection (outdoor ladder)
18	Apron brush	25	Oil water separator (outdoor ladder)
19	Handrail with entrance protection		
20	Cascade chain break protection		
21	Step loss protection		

Standard safety device	
1	Drive chain break protection
2	Step lighting
3	Emergency stop button
4	Handrail belt break protection device
5	Comb plate safety protection device
6	Brake protection
7	Drive chain break protection
8	Electrical circuit protection
9	Motor overload protection
10	Phase loss, misalignment protection
11	Overspeed protection
12	Non-operational reversal protection
13	Overhaul safety switch
14	Start the alarm device

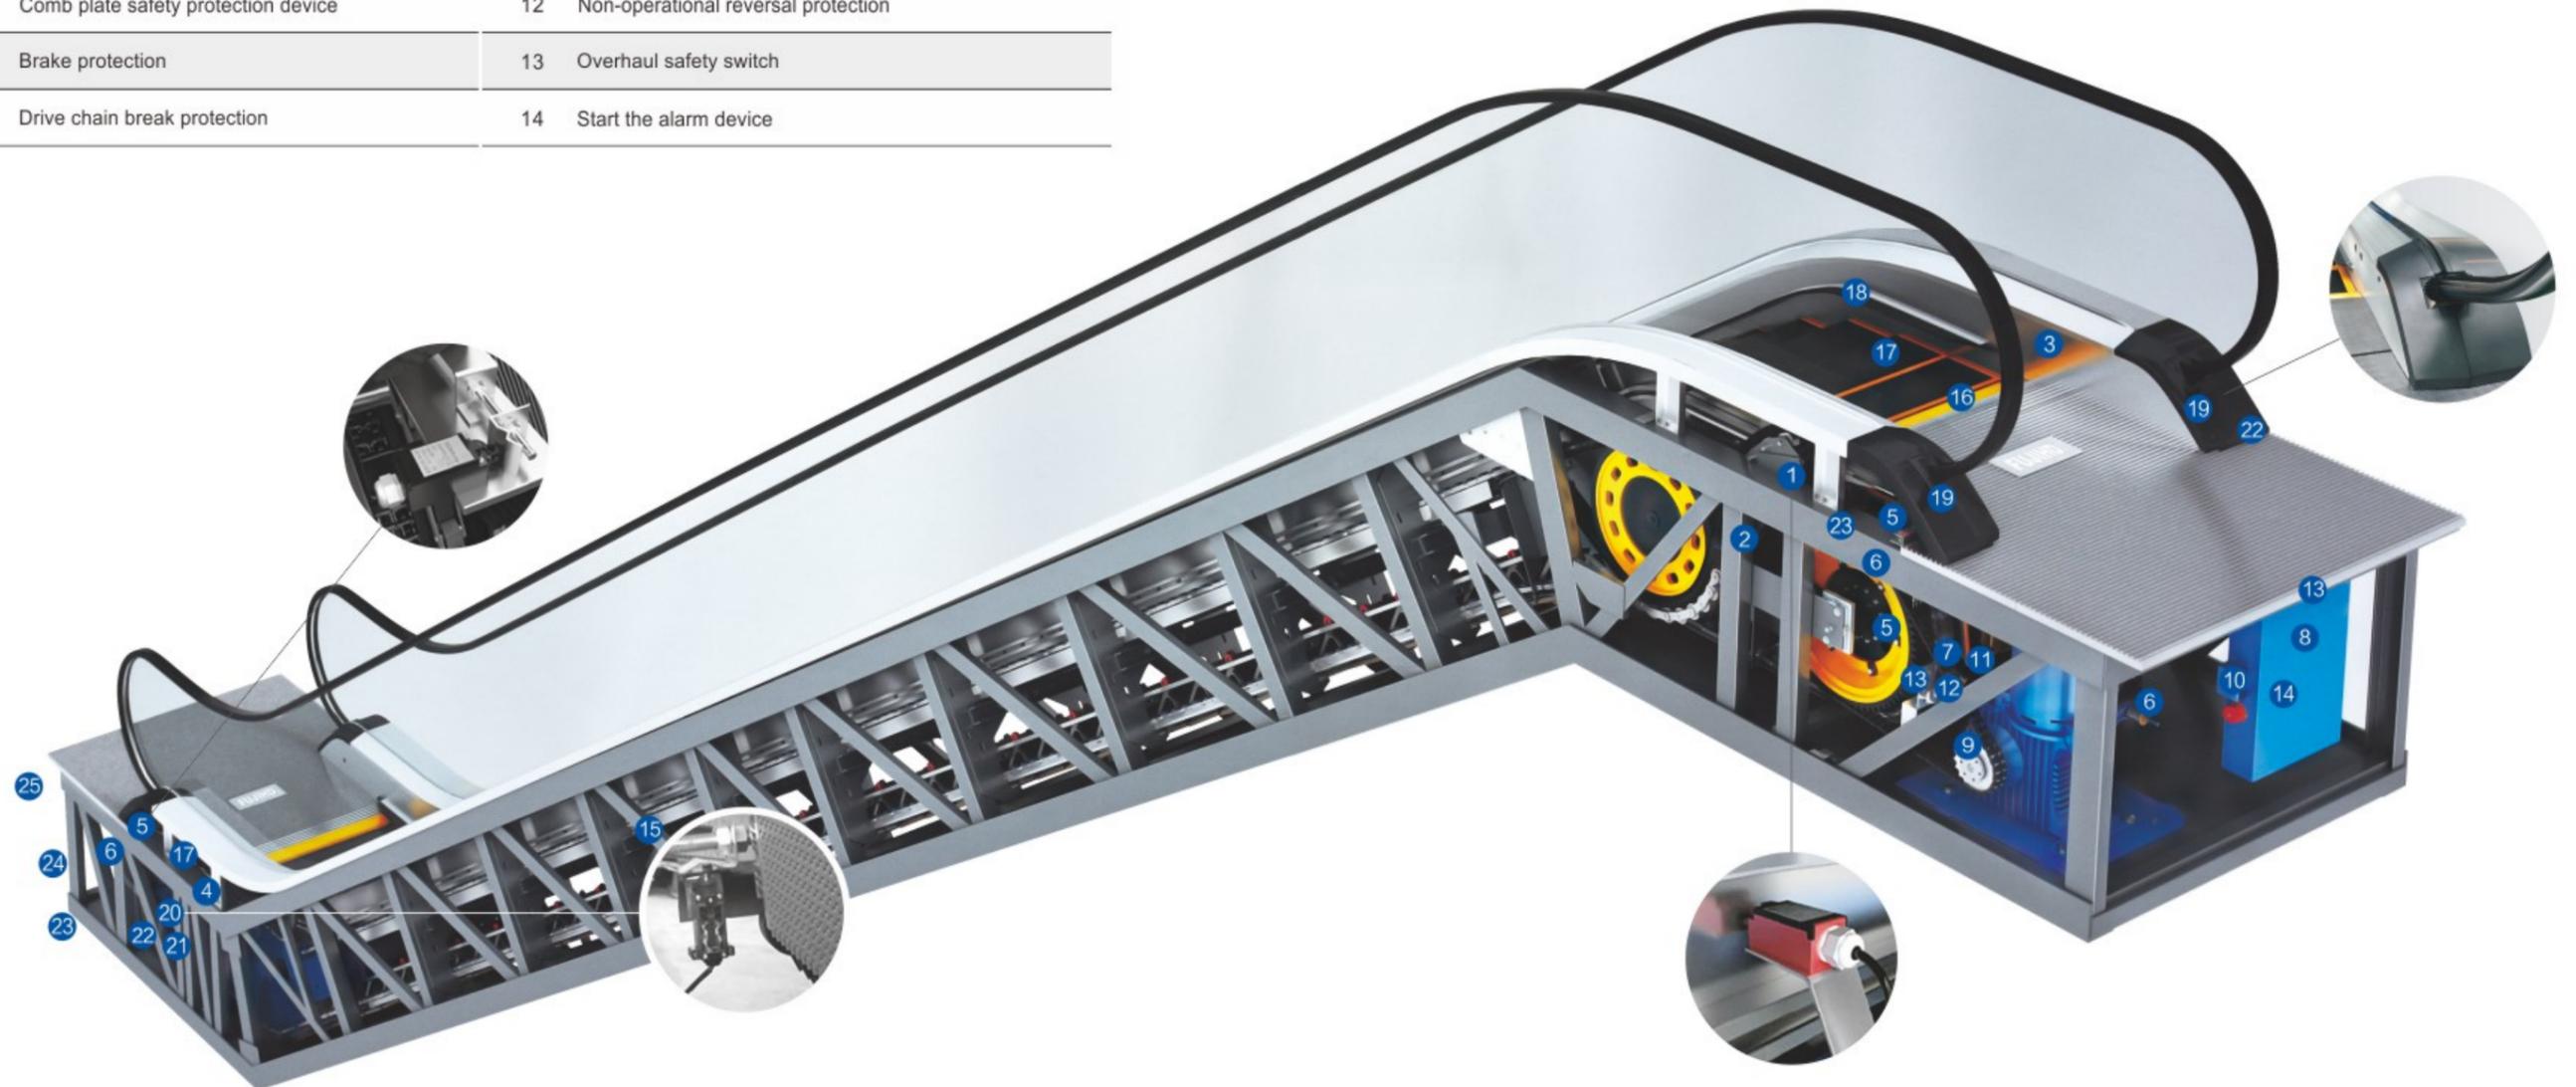

# Escalator safety escort

## Cover design

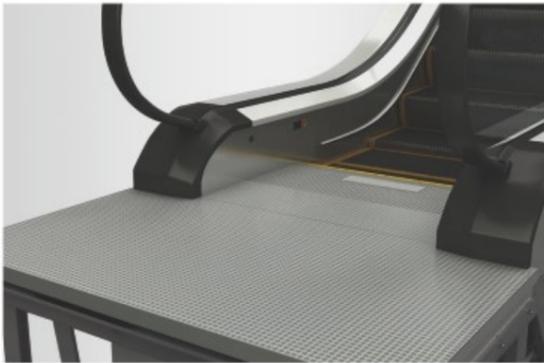


When the foreign object is caught between the apron board and the steps, the escalator will automatically stop running.

## Handrail entrance security



The entrance of the handrail belt is equipped with a safety device. When the foreign object is caught at the entrance of the handrail, the escalator will automatically stop running.

## Cascade sagging protection

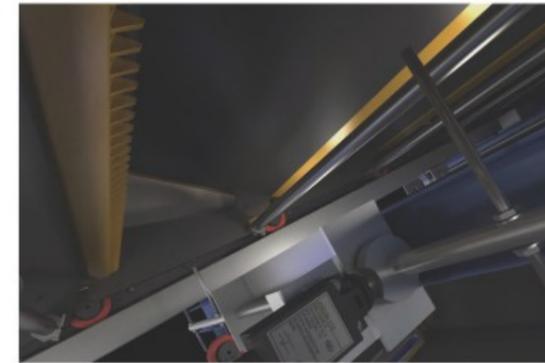

The monitoring device should be set up at each of the drive station and the steering station to ensure that no gaps due to missing steps will appear at the entrance, whether the equipment is up or down.

## Cascade chain break protection



When the step is found to have an abnormal bend, the escalator will stop running before the step enters the comb plate.

## Drive link protection



When the drive chain is overstretched or broken, the escalator will automatically stop running.

## Non-operational reversal protection




The sensor is installed on the main brake. When the escalator reverses, the main engine brakes safely.

## Comb safety protection



If the foreign object is caught between the moving step and the stationary comb plate, triggering the safety switch on both sides of the monitoring comb plate, the whole ladder will stop automatically.

## Step loss detection

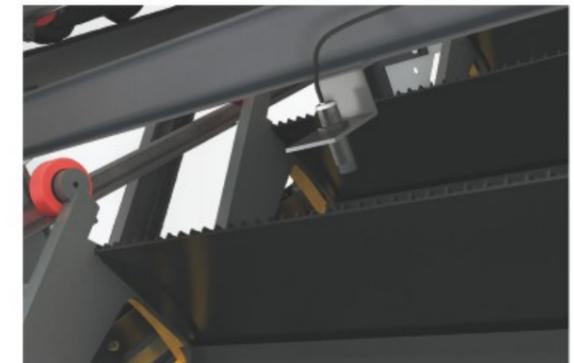


A monitoring device is provided at each of the drive station and the steering station, and when the step is missing, the escalator stops immediately.

# Optional function

## Comb-board Lighting

White/blue/red

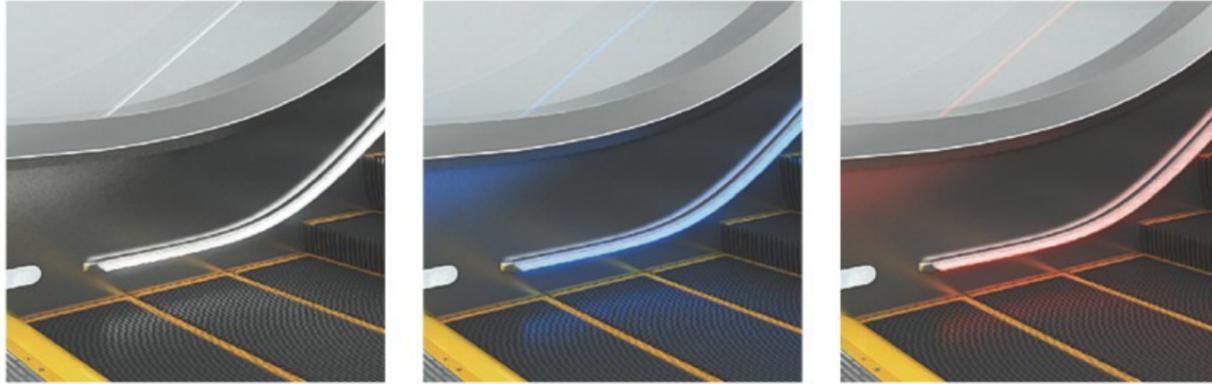

## Handrail color

Gray/red/orange/blue




## Voice HMI system

Voice prompt ride considerations




## Comb

Aluminum alloy

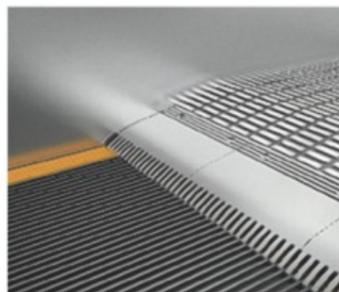

## Front panel, floor panel


Aluminum alloy

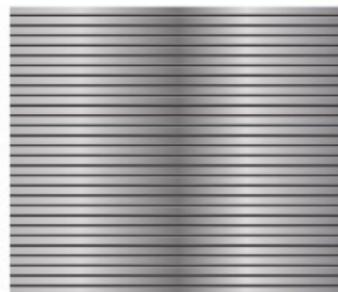

# Perfect layout


## Intermittent layout (one-way traffic)

Suitable for operation between three floors in a smaller mall.

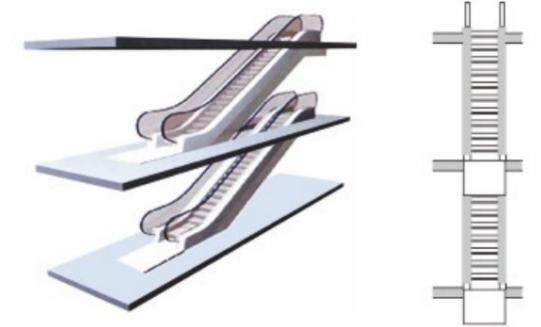


## Parallel continuous arrangement (two-way traffic)

This kind of separation is not very convenient for the customer, but it is very advantageous for the owner of the store, because you can provide them with special services on the way to the escalator.

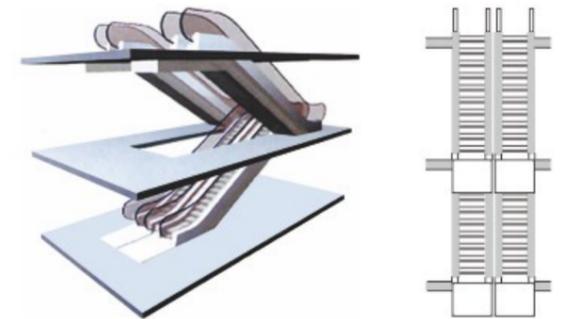


## Cross-continuous arrangement (two-way traffic)

The cross-continuously arranged escalators installed in multiple floors can serve two running directions. This form is mostly used in shopping malls, and now more and more used in government agencies and public places, it can reduce between small main floors. Running time.

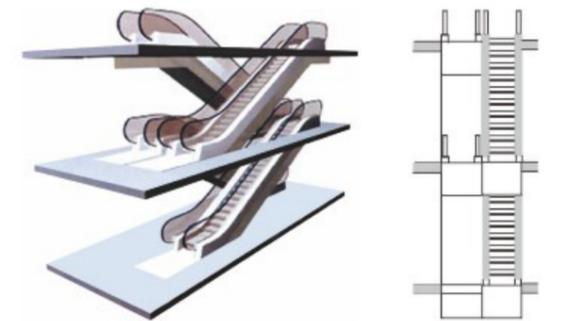


## Continuous layout (one-way traffic)

A continuous configuration of escalators or sidewalks that connect several floors. It requires more space than intermittent.

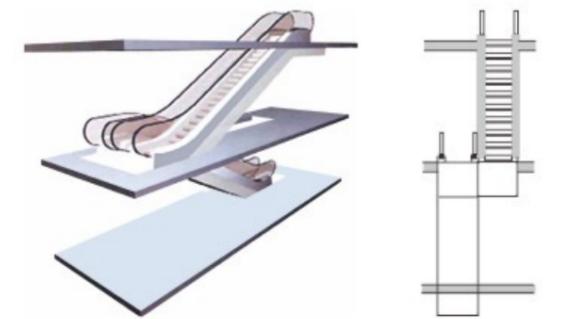


# Escalator Construction Parameters

## 30° Escalator construction layout drawing

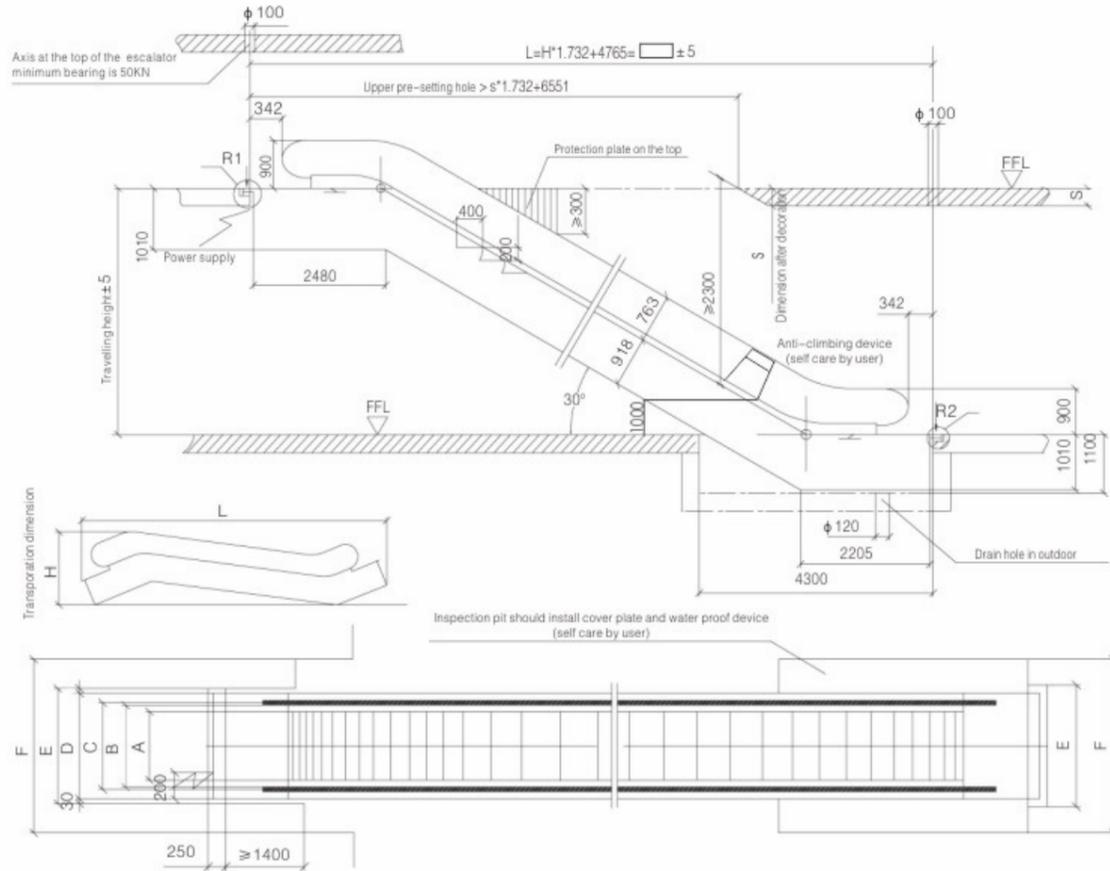


Motor capacity (KW)	Traveling height (Ladder width) 1000		Traveling height (Ladder width) 800		Traveling height (Ladder width) 600			
	5.5	7.5	5.5	7.5	5.5	7.5		
1000	1000	1158	1238	1600	1660	2310		
800	800	958	1038	1400	1460	2110		
600	600	758	838	1200	1260	1910		
Step width	A	B	C	D	E	F		
Model	Traveling height (mm)		Net weight (KN)		Bearing Capacity (KN)		Transporation dimension (mm)	
FHE(600)-30 (3600人/h) Speed: 0.5m/s	3000		57	46	41	2750		10900
	3500		60	49	44	2780		11890
	4000		64	52	47	2810		12880
	4500		68	56	50	2830		13870
	5000		71	59	53	2840		14860
	5500		75	62	56	2860		15860
FHE(800)-30 (4800人/h) Speed: 0.5m/s	3000		59	52	47	2750		10900
	3500		63	56	50	2780		11890
	4000		67	60	54	2810		12880
	4500		71	64	57	2830		13870
	5000		74	68	60	2840		14860
	5500		82	74	66	2860		15860
FHE(1000)-30 (6000人/h) Speed: 0.5m/s	3000		63	59	53	2750		10900
	3500		67	64	57	2780		11890
	4000		71	68	61	2810		12880
	4500		75	73	65	2830		13870
	5000		83	79	71	2840		14860
	5500		87	84	75	2860		15860

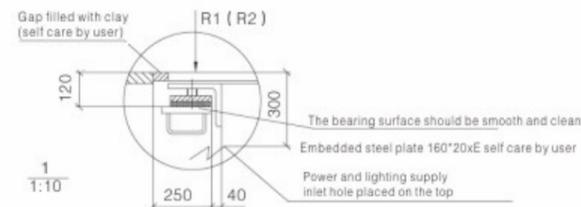


## Instruction

- When the escalator to be installed above the second floor. Don't have a pit. Layout drawing must be matched between up and down
- Keep the sufficient space at both EXIT and ENTRANCE of escalator. The width must be less than 1238. The depth from handrail belt reversed end to the front obstacle must be not less than 2500.
- Space between handrail belt of escalator and obstacle must be not less than 500.
- Motor AC 380 V 50 HZ. See in the table.
- By the user to provide a grounding resistance of less than 4 ohms.
- Provide by user to the main switch of the power requirements of 3 phases 5 wires.
- All the dimensions are measured by MM.

## 35° Escalator construction layout drawing

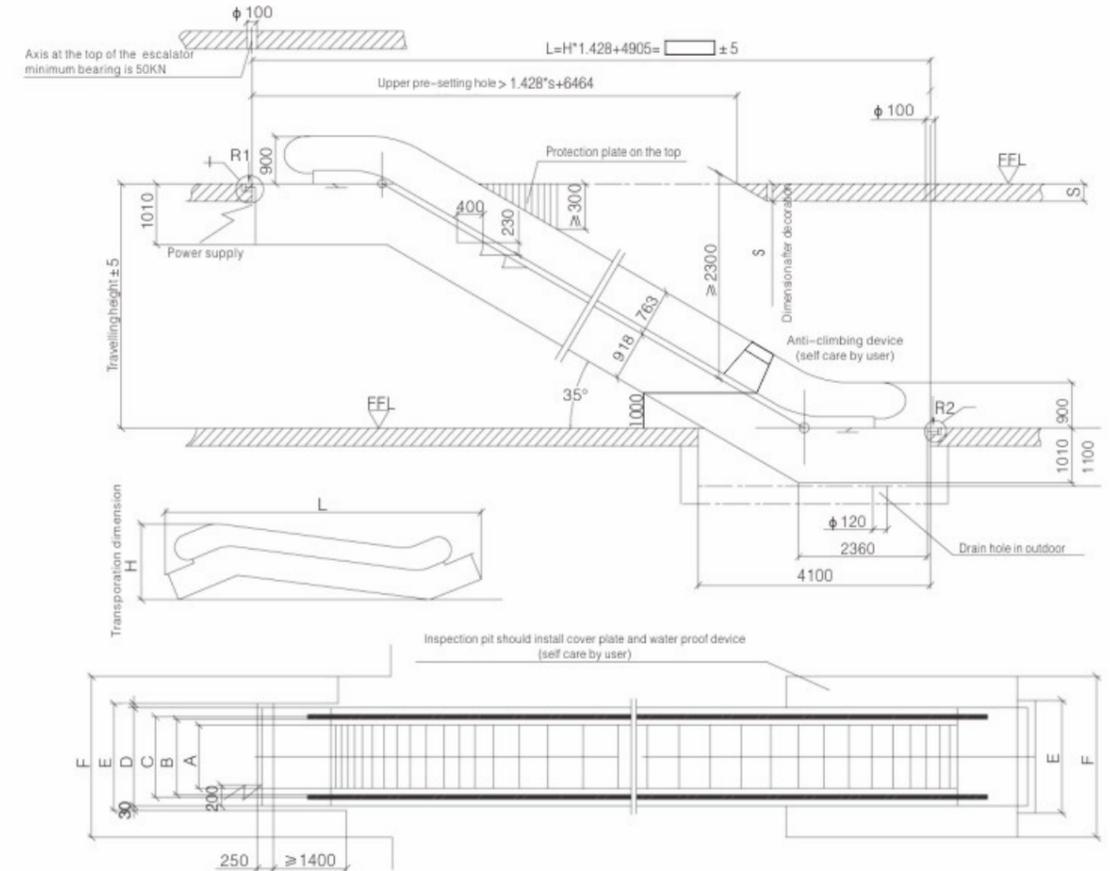

Motor capacity (KW)	Traveling height (Ladder width) 1000		Traveling height (Ladder width) 800		Traveling height (Ladder width) 600			
	5.5	7.5	5.5	7.5	5.5	7.5		
1000	1000	1158	1238	1600	1660	2310		
800	800	958	1038	1400	1460	2110		
600	600	758	838	1200	1260	1910		
Step width	A	B	C	D	E	F		
Model	Traveling height (mm)		Net weight (KN)		Bearing Capacity (KN)		Transporation dimension (mm)	
FHE35/600 (3600人/h) Speed: 0.5m/s	3000		54	43	39	2850		10180
	3500		57	46	41	2890		11030
	4000		60	49	44	2920		11890
	4500		64	52	46	2940		12750
	5000		67	54	49	2970		13610
	5500		70	57	51	2980		14470
FHE30/800 (4800人/h) Speed: 0.5m/s	3000		56	49	44	2850		10180
	3500		60	52	47	2890		11030
	4000		63	56	50	2920		11890
	4500		66	59	53	2940		12750
	5000		70	62	56	2970		13610
	5500		73	65	59	2980		14470
FHE35/1000 (6000人/h) Speed: 0.5m/s	3000		60	56	50	2850		10180
	3500		64	60	53	2890		11030
	4000		67	64	57	2920		11890
	4500		71	67	60	2940		12750
	5000		74	71	64	2970		13610
	5500		82	77	69	2980		14470

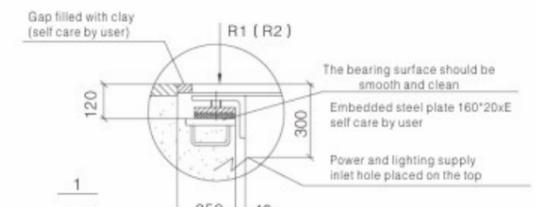


## Instruction

- When the escalator to be installed above the second floor. Don't have a pit. Layout drawing must be matched between up and down
- Keep the sufficient space at both EXIT and ENTRANCE of escalator. The width must be less than 1238. The depth from handrail belt reversed end to the front obstacle must be not less than 2500.
- Space between handrail belt of escalator and obstacle must be not less than 500.
- Motor AC 380 V 50 HZ. See in the table.
- By the user to provide a grounding resistance of less than 4 ohms.
- Provide by user to the main switch of the power requirements of 3 phases 5 wires.
- All the dimensions are measured by MM.

# Escalator Construction Parameters

Large height escalator construction layout drawing

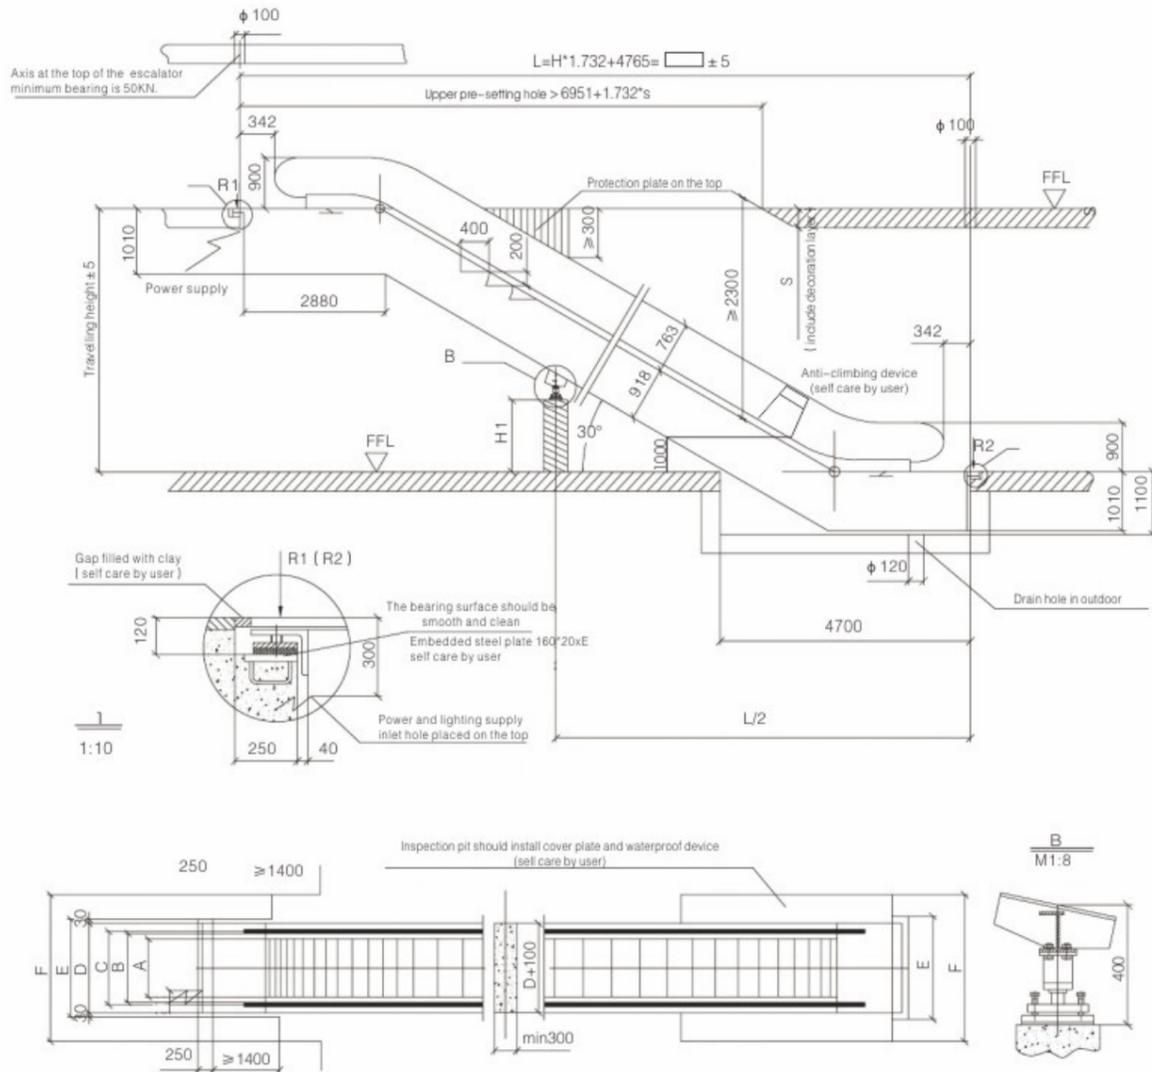

Motor capacity (KW)	Traveling height (Ladder width) 1000		Traveling height (Ladder width) 800		Traveling height (Ladder width) 600	
	6000-6600	11	6000-6800	11	6000-7000	11
	6700-7800	15	6900-7800	15	7100-7800	15
1000	1000	1158	1238	1600	1660	2310
800	800	958	1038	1400	1460	2110
Step width	A	B	C	D	E	F

### Note


1. when the travelling height of escalator is  $6000 < H < 7800$ , middle support should be set between the center of truss bearing beam. height of middle support  $H1 = H/2 + 1330$ . 2. bearing capacity of upper support beam  $R1 = H \times 0.007 + 46$ . 3. bearing capacity of downer support beam  $R2 = H \times 0.007 + 36$ . 4. capacity of center support  $R3 = H \times 0.0216 + 90$  User supply 380V AC 50Hz power When moving walk start to work, the voltage reduced 10% in normal situation, the voltege reduced 5% when working. the mix started current should less 3.5 times than rated.

### Instruction

- When the escalator to be installed above the second floor. Don't have a pit. Layout drawing must be matched between up and down
- Keep the sufficient space at both EXIT and EXTRANCE of escalator. The width must be less than 1238. The depth from handrail belt revered end to the front obstacle must be not less than 2500.
- Space between handrail belt of escalator and obstacle must be not less than 500.
- Motor AC 380 V 50 HZ. See in the table.
- By the user to provide a grounding resistance of less than 4 ohms.
- Provide by user to the main switch of the power requirements of 3 phases 5 wires.
- All the dimensions are measured by MM.

# Moving Walk Construction Parameters

12° Moving walk construction layout drawing

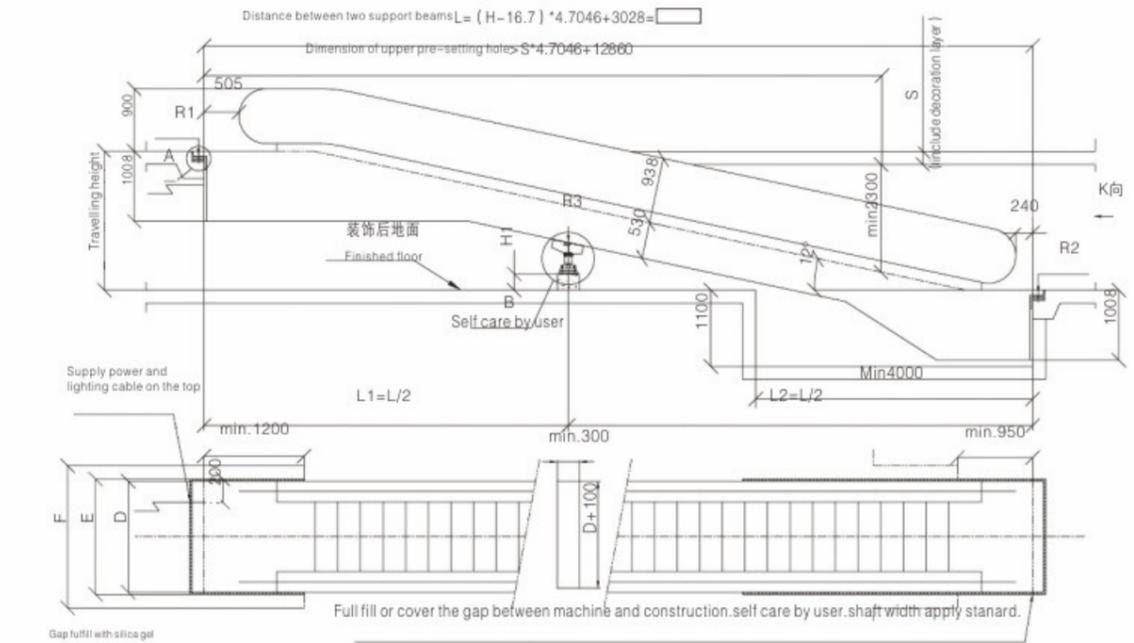

Motor capacity (KN)	Traveling height H		Traveling height H	
	1000-3000	5.5	1000-3200	5.5
	3000-4000	7.5	3300-4200	7.5
	4100-4200	8	4300-4400	8
	4300-6800	11	4500-7000	11
	6900-9000	15	7100-9200	15
Center supporting height H1	When the traveling height $2600 < H < 5800$ , we need to use one center support. And supporting height is $H1 = H/2 - 780$ .			
Center supporting height H2	When the traveling height $5800 < H < 7800$ , we need to use two center supports. The traveling height of first one is $H1 = H/3 - 881$ , and second one is $H2 = 2H/3 - 681$ .			
Power supply	User needs to supply 380V AC 50Hz three-phase five-wire power supply. Voltage should $\leq 10$ when moving walk at the start and the voltage should be $\leq 5$ in normal operation. Maximum starting current should less than 3.5 times of rated current.			


Technical notes		
Dip angle $\alpha$	12°	
Speed V	0.5m/s	
Step width A	1000	800
Handrail inner side distance B	1158	958
Handrail center distance C	1238	1038
Moving walk outside width D	1600	1400
Supporting beam length E	1660	1460
Exterior barrier width F	2310	2110
Pit width G	1660	1460
Support opposite force R1 [KN]	$0.009 \times L + 22$	$0.0078 \times L + 19$
Support opposite force R2 [KN]	$0.009 \times L + 10$	$0.0078 \times L + 9$
Support opposite force R3 [KN]	$0.0117 \times [L1 + L2]$	$0.01014 \times [L1 + L2]$
Support opposite force R4 [KN]	$0.0117 \times [L2 + L3]$	$0.0104 \times [L2 + L3]$

### Notes

- When the moving walk is installed in the second floor and above, pit is canceled. And the bottom and top of construction should be symmetrical.
- sufficient unblocked space is needed at entrance and exit of moving walk. The width should not less than 1310 and the depth from handrail belt swerving edge to any barrier should not less than 2500.
- the distance between moving walk and any barrier should  $\geq 500$
- User needs to supply a earth connection equipment with resistance less than 4 ohm.
- When the traveling height  $H \leq 2600$ , cancel to support R3, R4.
- When the travelling height  $2600 < H \leq 5800$ , we only need to support R3 and  $L1 = L2 = L/2$
- When the traveling height  $5800 < H \leq 7800$ , we only need to support R3, R4 and  $L1 = L2 = L/3$ .
- This plan is current 12° standard moving walk construction size. if the construction can not be executed, please contact Technology Department of Hengda Fuji Elevator Co., Ltd.
- The unit in this plan millimeter. We reserve right to change without prior notice.

# Moving Walk Construction Parameters

## 0° Moving walk construction layout drawing

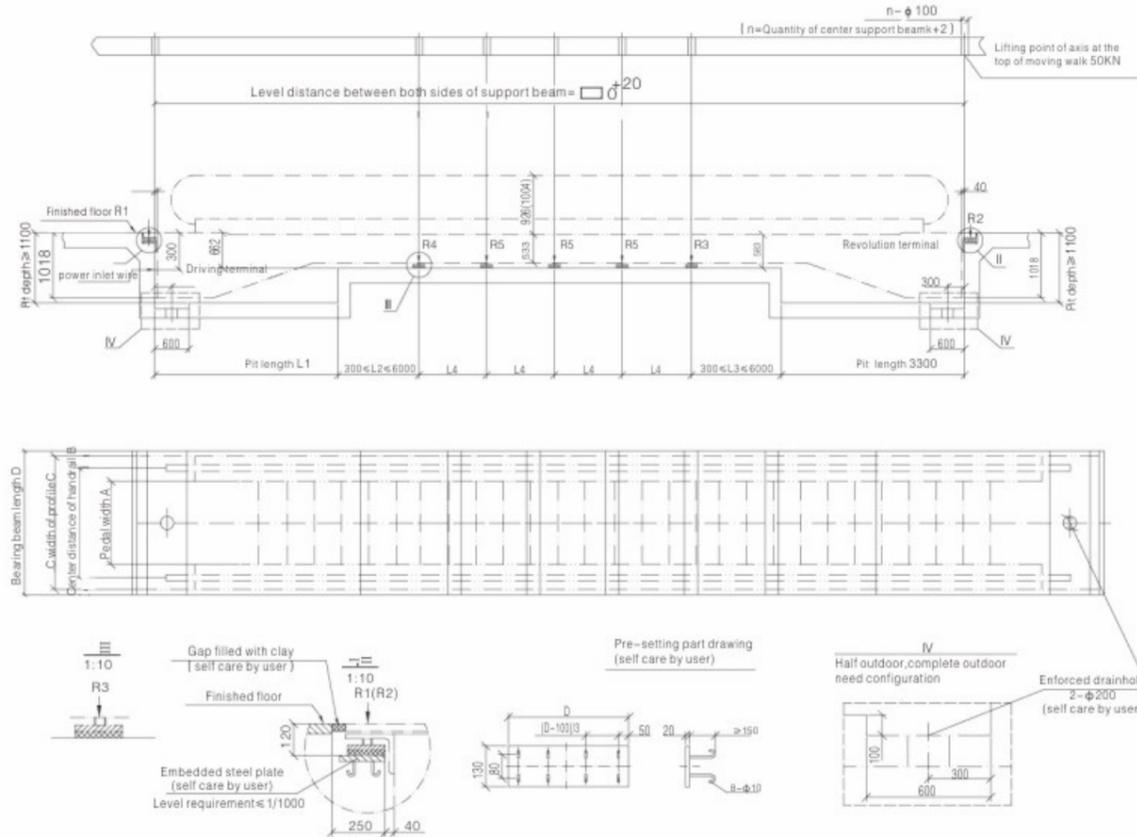

Pedal width		1000		800	
Quantity of center support beam L4		6000	10000	6000	10000
Support opposite force (KN)	R1	40	38	35	34
	R2	34.5	34	32	31
	R3	62.5	78.5	52	64.5
	R4	63.5	79.4	54	66.6
	R5	48	79.4	40	66.6
Motor capacity / rated current	conveyor length			conveyor length	
		10000-70000	8KW/18A	10000-80000	8KW/18A
		70001-110000	11KW/25A	80001-110000	11KW/25A


### Notes

- When the operating environment temperature under 0° (outdoor or semi-outdoor) need increase heater.
- Sufficient unblocked space is needed at entrance and exit of moving walk and the width should be the center distance at east,the depth(from handrail turn end) should be 2.5m at least,this area width should more than two times of the handrail center distance,the depth can be reduced to 2m.
- If have the pit should have waterproofing work(self-care by user).
- the distance between moving walk and any barrier should  $\geq 500$ , or the Triangle place of handrail and floor should install protecting board (self-care by user).
- user provide power supply and earth connection equipment with resistance less than 4 ohm,it should leave Two meters left margin line under the upper supporting beams,motor capacity according to left form.
- Luminance at least should be 50Lx at entrance and exit of indoor moving walk,luminance at least should be 15Lx at entrance and exit of outdoor and semi outdoor(self-care by user).
- If the middle supporting beam use steel frame structure, please ask Hengda Fuji Elevator Company for advice.
- two sides and bottom decoration of moving walk self-care by user.


Technical notes	
Dip angle $\alpha$	0-6°
Speed V	0.5m/s
Pedal type	aluminium alloy (indoor/half outdoor /complete outdoor)
Pedal width A	1000 800
Handrail center distance B	1238 1038
Moving walk outside width C	1600 1400
Machine supporting beam length D	$\geq 1660$ $\geq 1460$
Installation place/drive mode	Length L1
Indoor/star delta	4000
Indoor/frequency	
Semi-outdoor/star delta	4600
Semi-outdoor/frequency	
Outdoor/star delta	4000
Outdoor/frequency	4600
Power supply	User needs to supply 380V 50Hz three-phase five-wire power supply.Voltage should $\leq 10$ when moving walk at the start and the voltage should be $\leq 5$ in normal operation. Maximum starting current should less than 3.5 times of rated current.

# Installation Notice

- Besides complying with the drawing of the contract, attention should also be drawn to the following
- To ensure the safety of the escalator and moving walk, free space should be large enough in the landing area. (See the minimum size left)
- C = the distance of the handrails

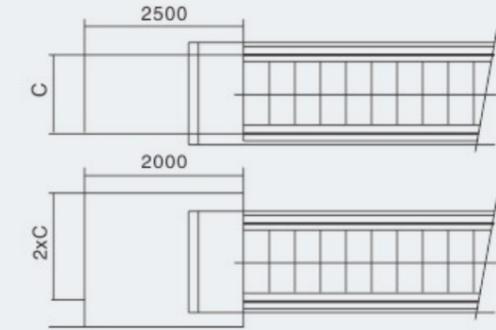

- Note: The graphical 1,2,3,4 safety devices function after the escalator installation and before the examination. They are at the users' own expense.

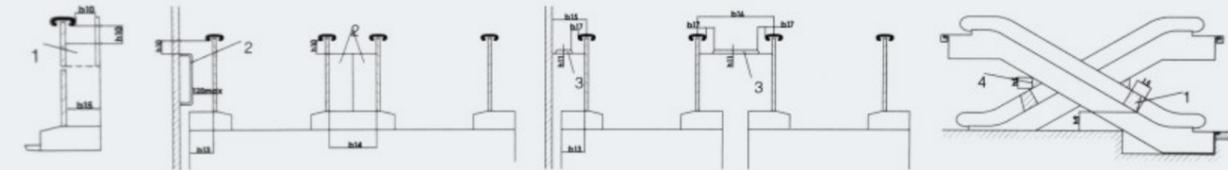

### Description

- Anti-creep device(5.5.2.2)
- Blocking device(5.5.2.2)
- Anti-skid device(5.5.2.2)
- Vertical apron(A.2.4)

Vertical apron	Clauses	Vertical apron	Clauses
b13,b14,b15,b16	5.2.2.2	h10=25mm-150mm	5.2.2.2
b17 $\geq 100$ mm	5.5.2.2	h11 $\geq 20$ mm	5.5.2.2
h5 $\geq 0.30$ m	A.2.4	L5 $\geq 1000$ mm	5.5.2.2
h9=(100 $\pm$ 50)mm	5.5.2.2	b10=80mm	

- Note: Graphical representation is not proportional. It is only used for graphic illustration.


- Outer cover plate of escalator / moving walk shall install anti-creep device(1). Please refer to above table for installing height of anti-creep device and extension length L5 of outer cover plate. Its height shall be the same as that of handrail surface. It shall also accord with the graphic stipulations.
- When escalator / moving walk is adjacent to the wall, outer cover plate width b13>125mm, blocking device (2) shall be installed in upper / lower end. It prevents the people from entering into outer cover plate area. When escalator / moving walk is adjacent to paralleled layout, common outer cover plate width b14>125mm, the blocking device shall also be installed. It shall be extended to height h10.
- When handrail cover-plate which is close to handrail height is installed between escalator / inclined moving walk and adjacent wall, and distance between building (wall) and handrail central line b15 is larger than 300mm,anti-skid device (3) shall be installed in handrail cover plate. Distance between anti-skid device and handrail shall  $\geq b17$ . Spacing distance between anti-skid devices shall  $\leq 1800$ mm. Height h11 shall  $\geq 20$ mm. The device has no sharp angle /edge. As for adjacent escalator / inclined moving walk, when distance between handrail center-lines b15 > 400mm, anti-skid device shall be installed. It shall also satisfy above requirements.

# Full service, heart-to-heart connection

Our service not only ensure your security, but also guarantee your investment in the equipment aspects. The true service is to foresee and satisfy the special requirements from vast customers because the service's definition varies according to the customers' demands. Therefore we should have the extensive and characteristic methods to satisfy these requirements.



**Enjoyable Service  
Perpetual Satisfaction**

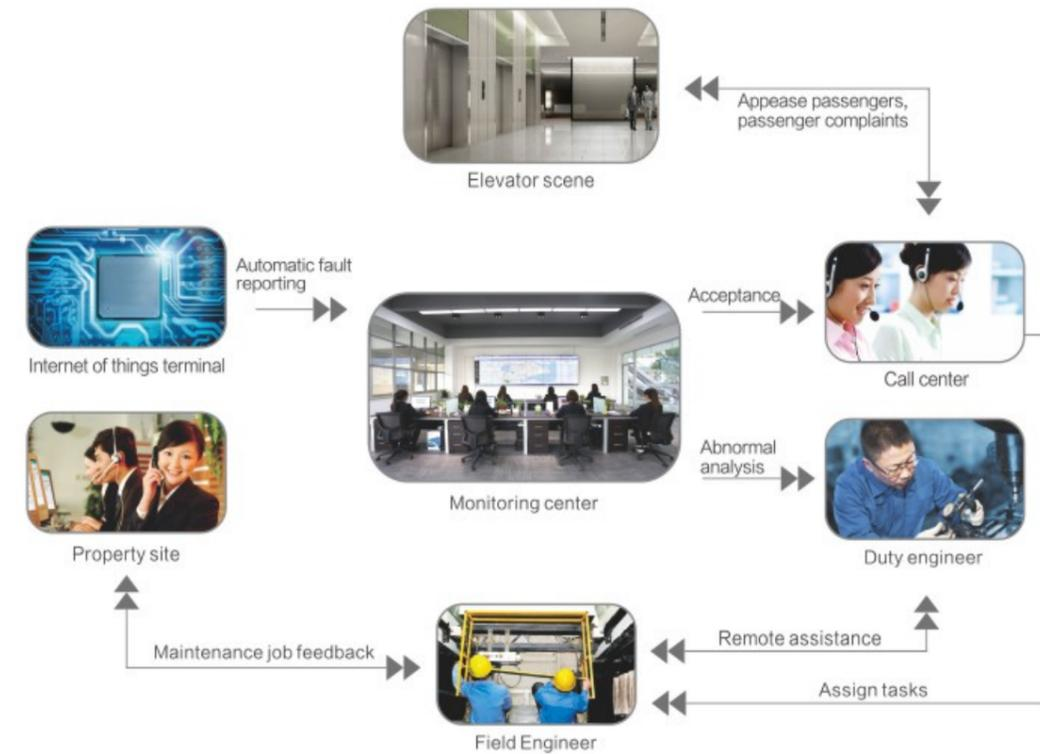

- **Service Center**

From building projects for customers to lifelong service of the products, HENGDA FUJI elevator provides customers meticulous services with great consideration through all the procedures.

- **The national wide after-sale service network**

HENGDA FUJI elevator sets up many branches in the domestic cities. We provide the local customers first time response and prompt replacement parts supply.

- **24-hour urgent air service**

24-hour customer hotline setted for troubleshooting offers high-quality after-sales service within the shortest period.

- **Monitor network**

HENGDA FUJI elevator regularly assigns staff to detect your equipment's operation conditions and provides the most professional maintenance.